Foreward

ASBESTOS SURVEY REPORT FOR JOPLING HOUSE, JOHN STREET, SUNDERLAND, SR1 1DP.

I have enclosed for your information and retention the most recent asbestos survey (Management) which applies to the property stated above. The purpose of the survey is to identify as far as possible, the materials containing asbestos fibres in your property.

The attached report is divided in sections so as to give as much information as possible, a basic reference section for use by premises managers and a more detailed report for use by contractors on site etc.

Plan of the Building and Sample Locations

This contains a plan of the building and identifies where asbestos samples have been taken from.

Photographs of Areas Sampled

This section contains photographs of all the areas where samples were taken. These photographs can be used when carrying out the periodic inspections to see if there has been any change or deterioration in its condition.

Survey Information

This section contains the survey information as printed from the central database held at Land and Property. It describes the type of asbestos present, its location, condition etc. Contractors should be shown this section along with the others when they are shown the register prior to starting any work.

Priority Risk Assessments

This section contains assessments which have been created using information from the survey and information on your property. This assessment helps to determine how often periodic checks on any asbestos need to be carried out by your Samo.

5 Simple Steps to Asbestos Management

This section details procedures for managing asbestos in your property. It gives guidance on the register, the inspections, any planned work and what to do when contractors arrive on site.

Commonly asked Questions

This section covers questions most commonly asked and can be referred to as/when the need arises.

The building has been surveyed as comprehensively as possible, all potentially fibrous materials have been examined and where necessary analysed by competent UKAS accredited analysts and the findings of both recorded in the report.

This report is an important document and must be referred to before any building works are carried out. The report must be kept with your handbook and the checklists completed on a regular basis. You will be reminded when your specific checklists are due for submission.

Information for Employees Working in Premises where Asbestos Containing Materials Exist.

Asbestos is made up of fibrous materials, which are flexible, mechanically strong and resistant to stretching, heat and chemicals. As a consequence asbestos has been used extensively in buildings. Examples of asbestos containing materials found in buildings include exterior asbestos cement cladding; gutters and pipes; fireproof sprays on structural steel joists; insulation boards in service ducts and wall partitions; ceiling and floor tiles and pipe and boiler lagging.

Asbestos containing products can produce very small fibrous dust particles, which can not be seen by the naked eye. It is only when these fibres become airborne, due to damage, deterioration, disturbance etc, that there is a risk to health.

If asbestos is maintained in good condition and is not disturbed or damaged it does not pose a health risk.

The authority has a management system for ensuring that you are not exposed to asbestos containing materials that are in poor condition and may pose a health risk. This system is based on sound principals laid down by legislation and associated codes of practice and guidance.

It is not appropriate simply to remove all asbestos containing materials in buildings. Asbestos materials that are sound, undamaged and not releasing dust should be left alone. Any disturbance to such materials, however carefully controlled, will release fibres and be counter-productive.

Within the building you occupy, your department has nominated a Site Asbestos Monitoring Officer (SAMO). This individual is responsible for inspecting the asbestos containing materials to ensure they are not in a dangerous condition. Should you have any concerns about suspect materials within your premises you should contact the SAMO.

Restrictions on use, distribution and publication of the report

We accept no responsibility or liability for the consequences of this document being used for purpose other than for which it was commissioned.

To the extent that the document is based on the information available at the time of writing, Sunderland City Council accepts no liability for any consequences should this report be used for any other purpose If you require any further information regarding the report or its application please contact Caroline Bage, Asbestos Manager on Tel: 07557 938966.

Yours sincerely,

Neil Guthrie Director of Development and Property





Control of Asbestos Regulations 2012

Asbestos Register for

Jopling House, John Street, Sunderland



UPRN: - J171340

TF Ref:

Location of register:-

Premises Manager / Samo: - Tenant

Date: 27 June 2025

Contact Numbers List: -

Caroline Bage Asbestos Manager – 07557 938966

<u>Contents</u>

		<u>Section</u>
•	Plan of building and sample locations	1
•	Photographs of areas sampled	2
•	Survey information	3
•	Asbestos Management Plan, Priority Assessments,	4
•	Contacts Form, Code of Practice	4
•	5 Simple Steps of Asbestos Management	5
•	Commonly asked questions	6
<u>Appe</u>	ndices	C
•		
	Form 1 – Visitor Register	7
•	Form 1 – Visitor Register Form 2 – Periodic Return Checklist and Schedule	7 8
		7 8 9
	Form 2 – Periodic Return Checklist and Schedule	

Plan of Building and Samples Location

ltem No.	Sample Ref.	Area Sampled	Location Name	Inspection Frequency
1.	NO000251	Floor tiles Grey/pink	Z-Sub level 1 Shop Floor (Room Z1/001)	No Risk
2.	NO000252	Debris/Residue to ceiling void and floor	Z-Sub level 1 Shop Floor (Room Z1/001)	Removed Sept 2023
3.	NO000253	Pipework Gaskets	Z-Sub level 1 Shop Floor (Room Z1/001)	No Risk
4.	Presumed	Pipework Gaskets to deeply recessed to sample	Z-Sub level 1 Shop Floor (Room Z1/001)	This item is classed as very low risk and should be inspected every 12 months
5.	NO000254	Cable braiding insulation	Z-Sub level 1 Shop Floor (Room Z1/001)	No Risk
6.	NO000255	Cable braiding insulation	Z-Sub level 1 Shop Floor (Room Z1/001)	No Risk
7.	NO000256	Fuses flashguards	Z-Sub level 1 Shop Floor (Room Z1/001)	This item is classed as very low risk and should be inspected every 12 months
8.	NO000257	Debris/Residue	Z-Sub level 1 Shop Floor (Room Z1/001)	Removed Sept 2023
9.	NO000258	Debris/Residue from boiler room entrance across to	Z-Sub level 1 Shop Floor (Room Z1/001)	Removed Sept 2023
		stairs and adjacent areas		
10.	NO000259	Debris/Residue to redundant pump	Z-Sub level 1 Shop Floor (Room Z1/001)	No Risk
11.	NO000264	Debris/Residue to floor adjacent stairwell	Z-Sub level 1 Shop Floor (Room Z1/001)	Removed Sept 2023
12.	NO000266	Ceiling tile behind metal grid tiles	Z-Sub level 1 Shop Floor (Room Z1/001)	No Risk
13.	NO000267	Ductwork joints	Z-Sub level 1 Shop Floor (Room Z1/001)	This item is classed as low risk and should be inspected every 6 months
14.	NO000260	Floor tile on shelving	Z-Sub level 1 Store Room (Room Z1/006)	No Risk
15.	NO000261	Debris/Residue to redundant pipe hanger	Z-Sub level 1 Switch Room (Room Z1/007)	Removed Sept 2023
16.	As NO000254	Cable braiding insulation	Z-Sub level 1 Switch Room (Room Z1/007)	No Risk
17.	NO000256	Fuses flashguards	Z-Sub level 1 Switch Room (Room Z1/007)	This item is classed as very low risk and should be inspected every 12 months
18.	NO000302	Door seal/gasket discarded on floor	Z-Sub level 1 Switch Room (Room Z1/007)	No Risk
19.	NO000262	Debris/residue to	Z-Sub level 1 Plant	Removed Sept 2023

		floor	Room (Room Z1/008)	
20.	NO000263	Ductwork joints	Z-Sub level 1 Plant Room (Room Z1/008)	This item should be removed by a licensed contractor asap
21.	As NO000263	Ductwork joints	Z-Sub level 1 Staircase/Stairwell (Room Z1/009)	This item is classed as low risk and should be inspected every 6 months
22.	NO000265	Wall	Z-Sub level 1 Staircase/Stairwell (Room Z1/009)	This item should be removed by a licensed contractor asap
23.	As NO000265	Debris/Residue foot of stairwell and adjacent areas	Z-Sub level 1 Staircase/Stairwell (Room Z1/009)	Removed Sept 2023
24.	NO000301	Cable braiding insulation remnants to wall	Z-Sub level 1 Staircase/Stairwell (Room Z1/009)	No Risk
25.	NO000268	Floor tile	Z-Sub level 1 Store Room (Room Z1/010)	No Risk
26.	NO000269	Floor jointing compound	Z-Sub level 1 Store Room (Room Z1/014)	No Risk
27.	As NO000269	Floor jointing compound	Z-Sub level 1 Store Room (Room Z1/017)	No Risk
28.	NO000270	Floor tile red	Z-Sub level 1 Store Room (Room Z1/017)	No Risk
29.	As NO000269	Floor jointing compound	Z-Sub level 1 Tank Room (Room Z1/018)	No Risk
30.	NO000272	Floor tile cream	Z-Sub level 1 Tank Room (Room Z1/018)	No Risk
31.	As NO000256	Fuses flashguards	Z-Sub level 1 Tank Room (Room Z1/018)	This item is classed as very low risk and should be inspected every 12 months
32.	NO000271	Pipework gaskets	Z-Sub level 1 Tank Room (Room Z1/018)	This item is classed as very low risk and should be inspected every 12 months
33.	As NO000271	Pipework gaskets	Z-Sub level 1 Tank Room (Room Z1/018)	This item is classed as low risk and should be inspected every 6 months
34.	NO000273	Debris/Residue	Z-Sub level 1 Tank Room (Room Z1/018)	Removed Sept 2023
35.	NO000274	Floor tile pink grey	Z-Sub level 1 Shop Floor (Room Z1/019)	No Risk
36.	Presumed	Pipework Gaskets to deeply recessed to sample	Z-Sub level 1 Shop Floor (Room Z1/019)	This item is classed as very low risk and should be inspected every 12 months
37.	As NO000257	Debris/Residue	Z-Sub level 1 Shop Floor (Room Z1/019)	Removed Sept 2023
38.	As NO000266	Ceiling tile behind metal grid tiles	Z-Sub level 1 Shop Floor (Room Z1/019)	No Risk
39.	As NO000272	Floor tile cream	Z-Sub level 1 Shop Floor (Room Z1/019)	No Risk
40.	As	Ductwork joints	Z-Sub level 1 Shop	This item is classed as

	NO000267		Floor (Room Z1/019)	low risk and should be
	10000207			inspected every 6
				months
41.	As	Floor tile pink/grey	Z-Sub level 1	No Risk
41.	NO000251	Floor the plink/grey	Staircase/Stairwell	INO RISK
	10000231			
42.	1.0	Debrie (Deside to	(Room Z1/020) Z-Sub level 1 Store	Barray and Samt 2022
42.	As	Debris/Reside to		Removed Sept 2023
	NO000273	ceiling void and floor below	Room (Room Z1/021)	
40	D		7.0.1.1	
43.	Presumed	Pipework Gaskets	Z-Sub level 1 Store	This item is classed as
			Room (Room Z1/021)	very low risk and should
				be inspected every 12
				months
44.	As	Cable	Z-Sub level 1 Store	No Risk
	NO000254	braiding/insulation	Room (Room Z1/022)	
45.	As	Fuses flashguards	Z-Sub level 1 Store	This item is classed as
	NO000256		Room (Room Z1/023)	very low risk and should
				be inspected every 12
				months
46.	As	Floor tile	Z-Sub level 1 Store	No Risk
	NO000268		Room (Room Z1/023)	
47.	NO000275	Floor tile grey	Z-Sub level 1 Store	This item is classed as
			Room (Room Z1/026)	very low risk and should
				be inspected every 12
				months
48.	As	Floor tile grey	Z-Sub level 1 Store	This item is classed as
	NO000275		Room (Room Z1/027)	very low risk and should
				be inspected every 12
				months
49.	NO000276	Debris/Residue	Z-Sub level 1 Store	No Risk
		broken boards	Room (Room Z1/027)	
50.	As	Ductwork joints	Z-Sub level 1 Store	This item is classed as
	NO000267		Room (Room Z1/027)	low risk and should be
				inspected every 6
				months
51.	NO000277	Fuses/flashguards	Z-Sub level 1 Store	No Risk
		inside fuses	Room (Room Z1/027)	
		discarded		
		throughout		
52.	NO000278	Debris/residue to	Z-Sub level 1 Store	No Risk
		floor	Room (Room Z1/027)	
53.	NO000279	Debris/residue to	Z-Sub level 1 Store	Removed Sept 2023
		redundant	Room (Room Z1/027)	
		hangers/equipment		
54.	As	Ductwork joints	Z-Sub level 1 Plant	This item is classed as
U-T.	NO000267		Room (Room Z1/028)	very low risk and should
	110000207			be inspected every 12
				months
EE		Duotwork jointe	7 Sub loval 1 Stars	This item should be
55.	NO000280	Ductwork joints	Z-Sub level 1 Store	
			Room (Room Z1/029)	removed by a licensed
50	NOCOCC	Destas 1111	7.0.1.1.1.1.0	contractor asap
56.	NO000281	Ductwork joints	Z-Sub level 1 Store	This item is classed as
		red/brown mastic	Room (Room Z1/029)	very low risk and should
				be inspected every 12
				months
57.	As	Floor tile	Z-Sub level 1 Store	No Risk
	NO000268		Room (Room Z1/029)	

50	NO00000	Delevie (Deceieles de	7 Out loss 14 De lles	
58.	NO000282	Debris/Residue to	Z-Sub level 1 Boiler	Removed Sept 2023
		wall left of entrance	Room (Room Z1/030)	
59.	NO000283	Debris/Residue to	Z-Sub level 1 Boiler	Removed Sept 2023
00.	10000200	left wall	Room (Room Z1/030)	
60.	NO000284	Ceiling Shuttering	Z-Sub level 1 Boiler	This item is classed as
00.	110000201	Coming Chattoning	Room (Room Z1/030)	very low risk and should
				be inspected every 12
				months
61.	NO000285	Debris/Residue	Z-Sub level 1 Boiler	No Risk
01.	110000200	surrounding holes	Room (Room Z1/030)	
		for flues		
62.	NO000286	Debris/Residue to	Z-Sub level 1 Boiler	Removed Sept 2023
02.	10000200	rear RHS wall	Room (Room Z1/030)	
63.	NO000287	Debris/Residue to	Z-Sub level 1 Boiler	Removed Sept 2023
00.	10000201	floor	Room (Room Z1/030)	
64.	NO000288	Debris/Residue to	Z-Sub level 1 Boiler	No Risk
011	110000200	floor	Room (Room Z1/030)	
65.	NO000289	Floor tile	Z-Sub level 1 Boiler	Removed confirmed on
			Room (Room Z1/030)	survey J12535
66.	As	Floor tile	Z-Sub level 1 Store	No Risk
00.	NO000268		Room (Room Z1/032)	
67.	As	Pipework gasket	Z-Sub level 1 Store	This item is classed as
.	NO000271	perrorit guonot	Room (Room Z1/032)	very low risk and should
	110000211			be inspected every 12
				months
68.	NO000290	Pipework wrap to	Z-Sub level 1 Store	This item is classed as
00.	110000200	pipe penetrations	Room (Room Z1/032)	very low risk and should
		in ceiling		be inspected every 12
		in coming		months
69.	As	Floor tile pink/grey	Z-Sub level 1 Stairwell	No Risk
00.	NO000251	including debris up	Staircase (Room	
		the stairs	Z1/034)	
70.	NO000201	Floor tile red	Ground Floor Shop	This item is classed as
			Floor Unit 1 (Room	very low risk and should
			G/001)	be inspected every 12
				months
71.	NO000292	Floor tile grey	Ground Floor Shop	This item is classed as
			Floor Unit 1 (Room	very low risk and should
			G/001)	be inspected every 12
				months
72.	NO000293	Floor adhesive	Ground Floor Shop	This item is classed as
		remnants	Floor Unit 1 (Room	very low risk and should
			G/001)	be inspected every 12
				months
73.	NO000294	Window putty/seal	Ground Floor Shop	This item is classed as
		adjacent main	Floor Unit 1 (Room	very low risk and should
		entrance damaged	G/001)	be inspected every 12
		and in-situ		months
74.	NO000295	Debris/Residue to	Ground Floor Shop	This item is classed as
		entrance porch, on	Floor Unit 1 (Room	very low risk and should
		top and to sides,	G/001)	be inspected every 12
		including beneath		months
		shelf and		
		framework		
75.	NO000296	Debris/Residue to	Ground Floor Shop	Removed Sept 2023

		entrance porch	G/001)	
76.	NO000297	Ceiling tile including debris to floor	Ground Floor Shop Floor Unit 1 (Room G/001)	No Risk
77.	NO000298	Wall coating, rear wall beneath skim	Ground Floor Shop Floor Unit 1 (Room G/001)	No Risk
78.	NO000299	Floor tile brown surrounding columns	Ground Floor Shop Floor Unit 1 (Room G/001)	This item is classed as very low risk and should be inspected every 12 months
79.	NO000300	Debris/Residue surrounding feet of columns	Ground Floor Shop Floor Unit 1 (Room G/001)	Removed Sept 2023
80.	As NO000300	Debris/Residue surrounding feet of columns	Ground Floor Shop Floor Unit 1 (Room G/001)	Removed Sept 2023
81.	NO000316	Floor nosing to stairs step up to window	Ground Floor Shop Floor Unit 1 (Room G/001)	This item is classed as very low risk and should be inspected every 12 months
82.	As NO000295	Debris/Residue to floor	Ground Floor Porch Unit 1 (Room G/002)	Removed Sept 2023
83.	As NO000280	Ductwork joints	Ground Floor Porch Unit 1 (Room G/002)	This item is classed as low risk and should be inspected every 6 months
84.	As NO000293	Floor adhesive remnants	Ground Floor Store Room Unit 1 (Room G/003)	This item is classed as very low risk and should be inspected every 12 months
85.	As NO000293	Floor adhesive remnants	Ground Floor Store Room Unit 1 (Room G/004)	This item is classed as very low risk and should be inspected every 12 months
86.	NO000303	Floor tile grey/beige beneath modern lino	Ground Floor Store Room Bike Store (Room G/005)	This item is classed as very low risk and should be inspected every 12 months
87.	NO000304	Ceiling shuttering	Ground Floor Store Room Bike Store (Room G/005)	No Risk
88.	As NO000303	Tile grey/beige beneath carpet	Ground Floor Laboratory (Room G/007)	This item is classed as very low risk and should be inspected every 12 months
89.	As NO000303	Tile grey/beige beneath modern lino	Ground Floor Hallway/passageway Switch Room (Room G/008)	This item is classed as very low risk and should be inspected every 12 months
90.	NO000305	Pipework Gasket	Ground Floor Hallway/passageway Switch Room (Room G/008)	No Risk
91.	As NO000254	Cable braiding insulation	Ground Floor Switch Room behind lifts (Room G/009)	No Risk

0.2	NO000306	Floor jointing	Ground Floor Switch	No Risk
92.	NO000306	Floor jointing compound	Room behind lifts (Room	INO RISK
		compound	G/009)	
02	NO000307	Floor adhesive	Ground Floor	No Risk
93.	NO000307	remnants beneath		INO RISK
			Hallway/passageway lift	
0.4	NO000000	carpet	lobby (Room G/010)	Ne Diele
94.	NO000308	Debris/Residue to	Ground Floor	No Risk
		wall, mid landing	Staircase/Stairwell	
			(Room G/012)	
95.	NO000309	Debris/Residue	Ground Floor	Removed Sept 2023
			Staircase/Stairwell	
			(Room G/014)	
96.	As	Floor tile	Ground Floor	This item is classed as
	NO000303	grey/beige within	Staircase/Stairwell	very low risk and should
		electrical boxing to	(Room G/014)	be inspected every 12
		wall cavity and		months
		floor		
97.	As	Floor jointing	Ground Floor	No Risk
	NO000306	compound	Staircase/Stairwell	
			(Room G/014)	
98.	As	Floor tile	Ground Floor Office	This item is classed as
	NO000303	grey/beige carpet	(Room G/015)	very low risk and should
				be inspected every 12
				months
99.	As	Floor jointing	Ground Floor Store	No Risk
	NO000306	compound	Room (Room G/017)	
100.	NO000310	Pipework	Ground Floor Store	This item is classed as
		insulation in wall	Room (Room G/017)	low risk and should be
		penetration		inspected every 6
		portourduon		months
101.	As	Floor adhesive	Ground Floor Store	No Risk
	NO000307	remnants	Room (Room G/017)	
102.	As	Floor tile	Ground Floor Store	This item is classed as
102.	NO000303	grey/beige carpet	Room (Room G/017)	very low risk and should
	11000000	grey/beige ourper		be inspected every 12
				months
103.	NO000311	Wall to nail/screw	Ground Floor Store	No Risk
100.		heads. various	Room (Room G/017)	
		points on column		
104.	As	-	Ground Floor Store	No Risk
104.		Floor jointing	Room unit 4 (Room	
10-	NO000306	compound	-	
100			G/018)	No Diak
105.	As	Floor adhesive	G/018) Ground Floor Store	No Risk
105.			G/018) Ground Floor Store Room unit 4 (Room	No Risk
	As NO000307	Floor adhesive remnants	G/018) Ground Floor Store Room unit 4 (Room G/018)	
105. 106.	As	Floor adhesive remnants Pipework	G/018) Ground Floor Store Room unit 4 (Room G/018) Ground Floor Store	This item should be
	As NO000307	Floor adhesive remnants Pipework insulation packing	G/018) Ground Floor Store Room unit 4 (Room G/018) Ground Floor Store Room unit 4 (Room	This item should be removed by a licensed
	As NO000307	Floor adhesive remnants Pipework insulation packing to former wall	G/018) Ground Floor Store Room unit 4 (Room G/018) Ground Floor Store	This item should be
106.	As NO000307 NO000312	Floor adhesive remnants Pipework insulation packing to former wall penetration	G/018) Ground Floor Store Room unit 4 (Room G/018) Ground Floor Store Room unit 4 (Room G/018)	This item should be removed by a licensed contractor asap
	As NO000307	Floor adhesive remnants Pipework insulation packing to former wall penetration <i>Residue/Debris to</i>	G/018) Ground Floor Store Room unit 4 (Room G/018) Ground Floor Store Room unit 4 (Room G/018) Ground Floor Store	This item should be removed by a licensed
106.	As NO000307 NO000312	Floor adhesive remnants Pipework insulation packing to former wall penetration	G/018) Ground Floor Store Room unit 4 (Room G/018) Ground Floor Store Room unit 4 (Room G/018) Ground Floor Store Room unit 4 (Room	This item should be removed by a licensed contractor asap
106. 107.	As NO000307 NO000312 NO000313	Floor adhesive remnants Pipework insulation packing to former wall penetration Residue/Debris to floor	G/018) Ground Floor Store Room unit 4 (Room G/018) Ground Floor Store Room unit 4 (Room G/018) Ground Floor Store Room unit 4 (Room G/018)	This item should be removed by a licensed contractor asap <i>Removed Sept 2023</i>
106.	As NO000307 NO000312 NO000313 As	Floor adhesive remnants Pipework insulation packing to former wall penetration Residue/Debris to floor Floor jointing	G/018) Ground Floor Store Room unit 4 (Room G/018) Ground Floor Store Room unit 4 (Room G/018) Ground Floor Store Room unit 4 (Room G/018) Ground Floor Store	This item should be removed by a licensed contractor asap
106. <i>107.</i> 108.	As NO000307 NO000312 NO000313	Floor adhesive remnants Pipework insulation packing to former wall penetration <i>Residue/Debris to</i> <i>floor</i> Floor jointing compound	G/018) Ground Floor Store Room unit 4 (Room G/018) Ground Floor Store Room unit 4 (Room G/018) Ground Floor Store Room unit 4 (Room G/018)	This item should be removed by a licensed contractor asap <i>Removed Sept 2023</i> No Risk
106. 107.	As NO000307 NO000312 NO000313 As	Floor adhesive remnants Pipework insulation packing to former wall penetration Residue/Debris to floor Floor jointing	G/018) Ground Floor Store Room unit 4 (Room G/018) Ground Floor Store Room unit 4 (Room G/018) Ground Floor Store Room unit 4 (Room G/018) Ground Floor Store	This item should be removed by a licensed contractor asap <i>Removed Sept 2023</i>
106. <i>107.</i> 108.	As NO000307 NO000312 <i>NO000313</i> As NO000306	Floor adhesive remnants Pipework insulation packing to former wall penetration <i>Residue/Debris to</i> <i>floor</i> Floor jointing compound	G/018)Ground Floor Store Room unit 4 (Room G/018)Ground Floor Store Room unit 4 (Room G/018)Ground Floor Store Room unit 4 (Room G/018)Ground Floor Store Room (Room G/020)	This item should be removed by a licensed contractor asap <i>Removed Sept 2023</i> No Risk

	NO000301	insulation	Room (Room G/020)	
111.	Presumed	Pipework gasket	Ground Floor Unit 3	This item is classed as
	1 roodiniou	too deeply	(café) limited inspection	very low risk and should
		recessed to	to ceiling (Room G/022)	be inspected every 12
		sample		months
112.	As	Wall to nail/screw	Ground Floor Unit 3	No Risk
	NO000311	heads various	(café) limited inspection	
		points on column	to ceiling (Room G/022)	
113.	As	Floor adhesive	Ground Floor Unit 3	No Risk
	NO000307	remnants	(café) limited inspection	
			to ceiling (Room G/022)	
114.	As	Floor tile remnants	Ground Floor Unit 3	This item is classed as
	NO000303		(café) limited inspection	very low risk and should
			to ceiling (Room G/022)	be inspected every 12
			((() () () () () () () () ()	months
115.	As	Floor adhesive	Ground Floor Shop	No Risk
	NO000307	remnants	Floor former store	
		Torritori	entrance (Room G/023)	
116.	As	Floor tile remnants	Ground Floor Shop	This item is classed as
	NO000303		Floor former store	very low risk and should
	110000000		entrance (Room G/023)	be inspected every 12
				months
117.	NO000314	Debris/Residue to	Ground Floor Shop	Removed Sept 2023
	10000011	both floor voids	Floor former store	riometed copt 2020
		adjacent front	entrance (Room G/023)	
		doors also on roller		
		shutter		
118.	As	Floor adhesive	Ground Floor Office	No Risk
	NO000307	remnants	(Room G/026)	
119.	As	Floor adhesive	Ground Floor	No Risk
	NO000307	remnants	Hallway/passageway	
			(Room G/027)	
120.	As	Floor adhesive	Ground Floor	No Risk
	NO000307	remnants	Hallway/passageway	
			(Room G/028)	
121.	NO000315	Ceiling tiles	Ground Floor Bin store	No Risk
			(Room G/031)	
122.	As	Floor adhesive	Ground Floor Bin store	No Risk
	NO000307	remnants	(Room G/031)	
123.	As	Ceiling tiles	Ground Floor Store	No Risk
	NO000315	0	Room (Room G/032)	
124.	As	Floor adhesive	Ground Floor Store	No Risk
	NO000307	remnants	Room (Room G/032)	
125.	As	Floor adhesive	Ground Floor Staff	No Risk
	NO000307	remnants	Room (Room G/035)	
126.	As	Floor adhesive	Ground Floor Office	No Risk
0.	NO000307	remnants	(Room G/036)	
127.	As	Floor adhesive	Ground Floor Entrance	No Risk
	NO000307	remnants	Hall/Foyer/Lobby	
			(Room G/037)	
128.	As	Floor adhesive	Ground Floor	No Risk
.20.	NO000307	remnants	Hallway/Passageway	
			(Room G/038)	
129.	NO000317	Floor tile to former	Ground Floor	This item is classed as
.20.	110000017	shop floor and	Staircase/Stairwell	very low risk and should
		understairs area	(Room G/039)	be inspected every 12
				months
L	1	1	1	monuto

130.	40	Floor adhesive	Cround Floor	No Risk
130.	As		Ground Floor	
	NO000307	remnants	Staircase/Stairwell	
			(Room G/039)	+
131.	NO000318	Wall – within hole	Ground Floor	No Risk
		in wall under stairs	Staircase/Stairwell	
			(Room G/039)	
132.	NO000319	Window putty/seal	Ground Floor	This item is classed as
		to discarded	Staircase/Stairwell	very low risk and should
		window	(Room G/039)	be inspected every 12
				months
133.	NO000320	Floor tile	First Floor Plant Room	No Risk
			(Room 1/005)	
134.	NO000321	Floor tile beneath	Second Floor Landing	No Risk
		carpet	including stairs up	
		carper	(Room 2/001)	
135.	NO000321	Floor tile beneath	Second Floor Landing	No Risk
100.	10000321	carpet	(Room 2/003)	
136.	As	Floor tile	Second Floor Plant	No Risk
130.				
407	NO000320		Room (Room 2/004)	Ne Diele
137.	NO000322	Wall Coating	Second Floor Plant	No Risk
			Room (Room 2/004)	
138.	NO000323	Wall void cavity	Second Floor Plant	No Risk
			Room (Room 2/004)	
139.	NO000324	Ceiling void	Second Floor	No Risk
		insulation top	Hallway/passageway	
		Of ceiling heater	(Room 2/010)	
140.	As	Floor tile beneath	Second Floor	No Risk
	NO000321	carpet	Hallway/passageway	
			(Room 2/013)	
141.	NO000325	Debris/Residue to	Second Floor Fire	Removed Sept 2023
		stairs	escape (Room 2/015)	,
142.	NO000326	Debris/Residue to	Second Floor Fire	Removed Sept 2023
		side stairs	escape (Room 2/015)	
		(external wall)		
		including sloping		
		runner		
143.	NO000327	Floor nosing to	Second Floor Fire	This item is classed as
140.	10000327	stairs	escape (Room 2/015)	very low risk and should
		Stans	(10011 2/013)	be inspected every 12
				months
111	<u> </u>	Floor tile beneath	Second Floor	
144.	As		Second Floor	No Risk
	NO000321	carpet	Hallway/passageway	
4.45			(Room 2/016)	
145.	As	Floor tile beneath	Second Floor	No Risk
	NO000321	carpet	Hallway/passageway	
			(Room 2/017)	
146.	As	Floor tile beneath	Second Floor Store	No Risk
	NO000321	carpet	Room (Room 2/018)	
147.	NO000328	Pipework lining to	Second Floor Store	Removed Sept 2023
		insulation	Room (Room 2/018)	
		remnants		
	1	Window/putty seal	Second Floor Store	This item is classed as
148.	NO000330			
148.	NO000330		Room (Room 2/018)	very low risk and should
148.	NO000330	from removed	Room (Room 2/018)	very low risk and should be inspected every 12
148.	NO000330		Room (Room 2/018)	be inspected every 12
		from removed window		be inspected every 12 months
148. 149.	NO000330 As NO000321	from removed	Room (Room 2/018) Second Floor Store Room Former toilets	be inspected every 12

			(Room 2/019)	
150.	NO000329	Ductwork	Second Floor Store Room Former toilets (Room 2/019)	This item is classed as very low risk and should be inspected every 12 months
151.	NO000331	Ceiling void ceiling above panel	Third Floor Landing (Room 3/001)	This item is classed as low risk and should be inspected every 6 months
152.	NO000332	Wall tile	Third Floor Plant Room (Room 3/004)	No Risk
153.	NO000333	Debris/Residue to stairs	Third Floor Fire Escape (Room 3/016)	This item is classed as low risk and should be inspected every 6 months
154.	NO000334	Ceiling sloping Packing to girders	Third Floor Fire Escape (Room 3/016)	No Risk
155.	NO000328	Pipework lining to insulation remnants to 2 large pipes and floor	Third Floor Store Room (Room 3/021)	Removed Sept 2023
156.	Presumed	Pipework gaskets	Third Floor Store Room (Room 3/021)	This item is classed as very low risk and should be inspected every 12 months
157.	Presumed	Pipework gaskets too deeply recessed to sample	Third Floor Store Room (Room 3/023)	This item is classed as very low risk and should be inspected every 12 months
158.	As NO000335	Beam cladding suspected continuation from electric cupboard	Fourth Floor Landing (Room 4/001)	This item is classed as very low risk and should be inspected every 12 months
159.	As NO000335	Beam cladding beneath skim, sampled via pre- existing damage to skim	Fourth Floor Electric cupboard (Room 4/002)	This item should be removed by a licensed contractor asap
160.	NO000336	Beam cladding remnants beneath girder	Fourth Floor Hub/Network Room (Room 4/006)	This item is classed as very low risk and should be inspected every 12 months
161.	NO000337	Debris/Reside to steel girder	Fourth Floor Hub/Network Room (Room 4/006)	Removed Sept 2023
162.	NO000338	Debris/Resdue	Fourth Floor Hub/Network Room (Room 4/006)	No Risk
163.	As NO000336	Beam cladding remnants beneath girder	Fourth Floor Plant Room (Room 4/007)	Removed Sept 2023
164.	As NO000337	Debris/Reside to steel girder	Fourth Floor Plant Room (Room 4/007)	Removed Sept 2023
165.	As NO000338	Debris/Resdue	Fourth Floor Plant Room (Room 4/007)	No Risk
166.	NO000339	Tank pacing to	Fourth Floor Plant Room	No Risk

		brackets	(Room 4/007)	
167.	NO000340	Damp proof course surrounding windows	Fourth Floor Plant Room (Room 4/007)	No Risk
168.	NO000341	Fuses/flashguards	Fourth Floor Lift Machinery Room (Room 4/008)	This item is classed as very low risk and should be inspected every 12 months
169.	NO000342	Fuses/flashguards isolation strips	Fourth Floor Lift Machinery Room (Room 4/008)	This item is classed as very low risk and should be inspected every 12 months
170.	NO000373	Roof felt remnants to concrete	Fourth Floor Fire escape (Room 4/058)	No Risk
171.	NO000374	Wall coating to upper metal cladding	Fourth Floor External roof area (Room 4/059)	This item is classed as very low risk and should be inspected every 12 months
172.	Presumed	Pipework gaskets to sprinkler system	Mezzanine Switch Room midway between basement and ground floor	This item is classed as very low risk and should be inspected every 12 months
173.	NG001611	Wall panel	Ground Floor, Laundry (Room G/001)	No Risk
174.	NG001612	Floor tile (with adhesive) grey beneath carpet	Ground Floor, Laundry (Room G/001)	This item is classed as low risk and should be inspected every 6 months
175.	NG001609	Wall panel	Ground Floor, Entrance Hall/Foyer/Lobby Main lift lobby (Room G/002)	No Risk
176.	NG001616	Ceiling	Ground Floor, Entrance Hall/Foyer/Lobby Main lift lobby (Room G/002)	No Risk
177.	As NG001609	Wall panel	First Floor, Entrance Hall/Foyer/Lobby Main lift lobby (Room 1/001)	No Risk
178.	As NG001616	Ceiling	First Floor, Entrance Hall/Foyer/Lobby Main lift lobby (Room 1/001)	No Risk
179.	As NG001609	Wall panel	First Floor, Entrance Hall/Foyer/Lobby next to northerly fire exit (Room 1/002)	No Risk
180.	As NG001602	Wall panel	Staircase/Stairwell (Room 1/003)	No Risk
181.	As NG001603	Floor tile (with adhesive) red	Staircase/Stairwell (Room 1/003)	No Risk
182.	As NG001604	Floor covering	Staircase/Stairwell (Room 1/003)	No Risk
183.	NG001610	Wall panel	Corridor west corridor (Room 1/004)	No Risk
184.	As NG001616	Ceiling	Corridor west corridor (Room 1/004)	No Risk
185.	As NG001610	Wall panel	Staircase/Stairwell (Room 1/005)	No Risk

400				
186.	As NG001602	Wall panel	Bedroom 130 (Room 1/006)	No Risk
187.	As NG001596	Wall panel	Bedroom 214 (Room 1/007)	No Risk
188.	NG001600	Wall panel	Entrance Hall/Foyer/Lobby Lift lobby east (Room 2/001)	No Risk
189.	NG001602	Wall panel	Staircase/Stairwell North fire exit (Room 2/002)	No Risk
190.	NG001603	Floor tile with adhesive (red)	Staircase/Stairwell North fire exit (Room 2/002)	No Risk
191.	NG001604	Floor covering	Staircase/Stairwell North fire exit (Room 2/002)	No Risk
192.	As NG001602	Wall panel	Hallway/passageway Passage to Northerly fire exit (Room 2/003)	No Risk
193.	As NG001602	Wall panel	Bedroom 230 (Room 2/004)	No Risk
194.	NG001605	Wall panel	Corridor East Corridor (Room 2/005)	No Risk
195.	NG001613	Ceiling	Corridor East Corridor (Room 2/005)	No Risk
196.	NG001606	Wall panel	Staircase/Stairwell (Room 2/006)	No Risk
197.	As NG001606	Wall panel	Kitchen adjacent service cupboard (Room 2/007)	No Risk
198.	NG001607	Wall panel	Entrance Hall/Foyer/Lobby Lobby to emergency exit (Room 2/008)	No Risk
199.	NG001608	Wall coating	Staircase/Stairwell Emergency fire exit (Room 2/009)	No Risk
200.	As NG001596	Wall panel	Bedroom 214 (Room 2/010)	No Risk
201.	As NG001613	Ceiling	Corridor West corridor (Room 2/011)	No Risk
202.	NG001594	Wall panel	Staircase/Stairwell fire exit staircase (Room 3/001)	No Risk
203.	NG001595	Floor tile with adhesive	Staircase/Stairwell fire exit staircase (Room 3/001)	No Risk
204.	NG001596	Wall panel	Corridor East Corridor (Room 3/002)	No Risk
205.	NG001614	Ceiling coating	Corridor East Corridor (Room 3/002)	No Risk
206.	As NG001595	Floor tile with adhesive	Hallway/Passageway (Room 3/003)	No Risk
207.	NG001597	Wall panel	Staircase/Stairwell South stairwell (Room 3/004)	No Risk
208.	NG001598	Wall panel	Entrance Hall/Foyer/Lobby (Room 3/005)	No Risk
209.	NG001599	Wall panel	Staircase/Stairwell	No Risk

			(Room 3/006)	
210.	As	Wall panel	Plant Room (Room	
	NG001599		3/007)	No Risk
211.	NG001601	Wall panel	Bedroom 306 (Room 3/008)	No Risk
212.	As NG001602	Wall coating	Bedroom 330 (Room 3/009)	No Risk
213.	As NG001596	Wall panel	Corridor West Corridor (Room 3/010)	No Risk
214.	As NG001614	Ceiling coating	Corridor West Corridor (Room 3/010)	No Risk
215.	NG001588	Wall coating to brickwork	Entrance Hall/Foyer/Lobby (Room 4/001)	No Risk
216.	NG001589	Wall panel	Entrance Hall/Foyer/Lobby (Room 4/001)	No Risk
217.	NG001590	Wall panel	Bedroom 401 (Room 4/002)	No Risk
218.	NG001591	Wall panel	Bedroom 405 (Room 4/003)	No Risk
219.	NG001592	Wall panel	Corridor (Room 4/004)	No Risk
220.	NG001593	Wall coating	Stairs/Hall Landing Roof accessed (Room 4/005)	This item is classed as low risk and should be inspected every 6 months
221.	NG001615	Ceiling	Corridor (Room 4/006)	No Risk
222.	AW005669	Floor covering	Rear stairwell adjacent	
			Rm 301 (Room 2/001)	No Risk
223.	AW005670	Ceiling void – residue to redundant radiator	Corridor adjacent Rm 214 (Room 2/002)	No Risk
224.	AW005671	Ceiling void – paint coating to ceiling	Corridor adjacent Rm 316 (Room 3/001)	No Risk
225.	NZ001414	Debris/Residue to ceiling floor below	Loft space within lift lobby (Room 1/001)	No Risk
226.	As NZ001414	Debris/Residue to ceiling floor below	Loft space within crazy lobby (Room 1/002)	No Risk
227.	NZ001415	Debris/Residue to ceiling floor below	Loft space within corridors to flats 106- 111 (Room 1/003)	No Risk
228.	As NZ001415	Debris/Residue to ceiling floor below	Loft space within corridor adjacent flat 110 (Room 1/004)	No Risk
229.	NZ001416	Debris/Residue to ceiling floor below	Loft space within corridors to flats 112- 119 (Room 1/005)	No Risk
230.	As NZ001416	Debris/Residue to ceiling floor below	Loft space within corridors to flats 120- 125 (Room 1/006)	No Risk
231.	NZ001417	Debris/Residue to ceiling floor below	Loft space within corridors to flats 126- 130 (Room 1/007)	No Risk
232.	As NZ001417	Debris/Residue to ceiling floor below	Loft space within corridor adjacent flat 130 (Room 1/008)	No Risk

233.	NZ001418	Debris/Residue to	Loft space within	
		ceiling floor below	corridors to flats 101-	
			103 (Room 1/009)	No Risk
234.	As	Debris/Residue to	Loft space within	
	NZ001418	ceiling floor below	corridors to flats 104-	
			105 (Room 1/010)	No Risk
235.	NZ001408	Debris/Residue to	Loft space within lift	
		ceiling floor below	lobby (Room 2/001)	No Risk
236.	As	Debris/Residue to	Loft space within gaming	
	NZ001408	ceiling floor below	room lobby (Room	
			2/002)	No Risk
237.	NZ001409	Debris/Residue to	Loft space within	
		ceiling floor below	corridor to flats 207-208	
		0	(Room 2/003)	No Risk
238.	As	Debris/Residue to	Loft space within	
	NZ001409	ceiling floor below	corridor to flats 209-211	
			(Room 2/004)	No Risk
239.	NZ001410	Debris/Residue to	Loft space within	
200.		ceiling floor below	corridor adjacent flat 210	
			(Room 2/005)	No Risk
240.	As	Debris/Residue to	Loft space within	
240.	NZ001410	ceiling floor below	corridor to flats 212-219	
	112001410		(Room 2/006)	No Risk
241.	NZ001411	Debris/Residue to	Loft space within	
241.	112001411		corridor to flats 220-225	
		ceiling floor below		No Diak
0.40	Δ	Debrie /Desidue te	(Room 2/007)	No Risk
242.	As	Debris/Residue to	Loft space within	
	NZ001411	ceiling floor below	corridor adjacent lift	
0.40	N7004440		lobby (Room 2/008)	No Risk
243.	NZ001412	Debris/Residue to	Loft space within	
		ceiling floor below	corridor to flats 226-230	
	_		(Room 2/009)	No Risk
244.	As	Debris/Residue to	Loft space within	
	NZ001412	ceiling floor below	corridor adjacent flat 230	
			(Room 2/010)	No Risk
245.	NZ001413	Debris/Residue to	Loft space within	
		ceiling floor below	corridor to flats 201-203	
			(Room 2/011)	No Risk
246.	As	Debris/Residue to	Loft space within	
	NZ001413	ceiling floor below	corridor to flats 204-205	
			(Room 2/012)	No Risk
247.	NZ001403	Debris/Residue to	Loft space within lobby	
		ceiling floor below	(Room 3/001)	No Risk
248.	As	Debris/Residue to	Loft space within football	
	NZ001403	ceiling floor below	pool room lobby (Room	
			3/002)	No Risk
249.	NZ001404	Debris/Residue to	Loft space within	
		ceiling floor below	corridor to flats 306-311	
		0	(Room 3/003)	No Risk
250.	As	Debris/Residue to	Loft space within	
	NZ001404	ceiling floor below	corridor adjacent Flat	
			311 (Room 3/004)	No Risk
251.	NZ001405	Debris/Residue to	Loft space within	
201.		ceiling floor below	corridor to flats 312-319	
			(Room 3/005)	No Risk
252.	As	Debris/Residue to	Loft space within	
202.	NZ001405	ceiling floor below	corridor to flats 320-325	No Risk
	1403			NOTION


			(Room 3/006)	
253.	As	Debris/Residue to	Loft space within	
	NZ001404	ceiling floor below	corridor adjacent Flat	
			321 (Room 3/007)	No Risk
254.	NZ001406	Debris/Residue to	Loft space within	
		ceiling floor below	corridor to flats 326-330	
			(Room 3/008)	No Risk
255.	As	Debris/Residue to	Loft space within	
	NZ001406	ceiling floor below	corridor adjacent flat 330	
0.50	17004407		(Room 3/009)	No Risk
256.	NZ001407	Debris/Residue to	Loft space within	
		ceiling floor below	corridor to flats 301-304	No Dist.
057		Debrie/Desidue te	(Room 3/010)	No Risk
257.	As NZ001407	Debris/Residue to	Loft space within corridor to flats 301-304	
	NZ001407	ceiling floor below	(Room 3/011)	No Risk
258.	NZ001401	Debris/Residue to	Loft space within	NOTASK
200.		ceiling floor below	corridor to flats 413-414	
			(Room 4/001)	No Risk
259.	As	Debris/Residue to	Loft space within	
	NZ001401	ceiling floor below	corridor to flats 408-412	
		U U	(Room 4/002)	No Risk
260.	NZ001402	Debris/Residue to	Loft space within	
		ceiling floor below	corridor to flats 415-416	
			(Room 4/003)	No Risk
261.	As	Debris/Residue to	Loft space within	
	NZ001402	ceiling floor below	corridor to flats 403-407	
			(Room 4/004)	No Risk
262.	EV005969	Textured coated	Loft space/Ceiling void	
		wall & debris to	(R/01)	
		ceiling loft space		
		where the wall had		
		been damaged to		No Diak
		ducting installation		No Risk

Please note the survey carried out was non-intrusive and any areas not listed above may not have been accessed or had samples taken, should major refurbishment be planned for the property, further investigation will be required.

67

Photographs of Areas Sampled

1.	NO000251	Floor tiles Grey/pink	Z-Sub level 1 Shop Floor (Room Z1/001)	Does not contain asbestos.
2.	NO000252	Debris/Residue to ceiling void and floor	Z-Sub level 1 Shop Floor (Room Z1/001)	Removed Sept 2023
C				
3.	NO000253	Pipework Gaskets	Z-Sub level 1 Shop Floor (Room Z1/001)	Does not contain asbestos.
			TOPMASTER	

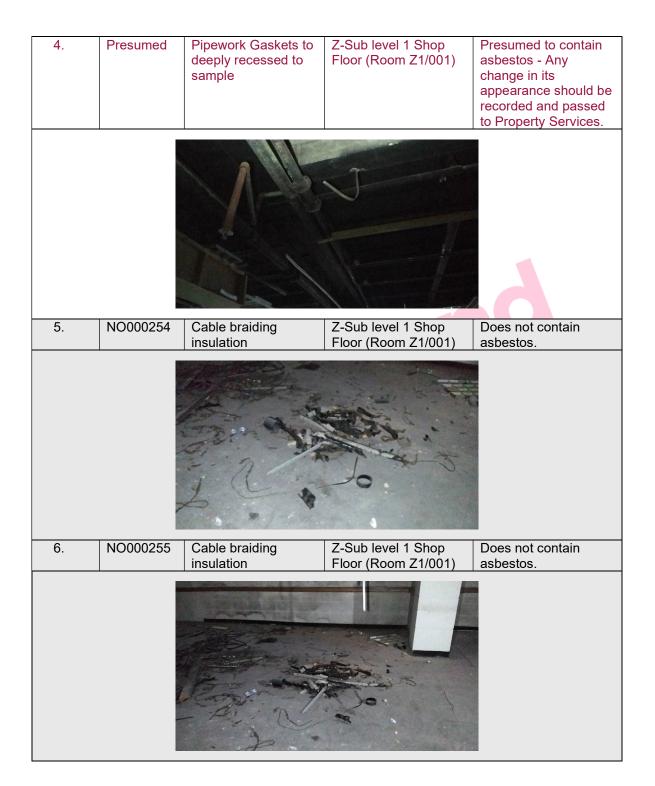


7.	NO000256	Fuses flashguards	Z-Sub level 1 Shop Floor (Room Z1/001)	Contains asbestos - Any change in its appearance should be recorded and passed to Property Services.
		PLEASE PAY HERE		
8.	NO000257	Debris/Residue	Z-Sub level 1 Shop Floor (Room Z1/001)	Removed Sept 2023
Ç				
9.	NO000258	Debris/Residue from boiler room entrance across to stairs and adjacent areas	Z-Sub level 1 Shop Floor (Room Z1/001)	Removed Sept 2023

10.	NO000259	Debris/Residue to redundant pump	Z-Sub level 1 Shop Floor (Room Z1/001)	Does not contain asbestos.
11.	NO000264	Debris/Residue to floor adjacent stairwell	Z-Sub level 1 Shop Floor (Room Z1/001)	Removed Sept 2023
Ç				
12.	NO000266	Ceiling tile behind metal grid tiles	Z-Sub level 1 Shop Floor (Room Z1/001)	Does not contain asbestos.

13.	NO000267	Ductwork joints	Z-Sub level 1 Shop Floor (Room Z1/001)	Contains asbestos - Any change in its appearance should be recorded and passed to Property Services.
14.	NO000260	Floor tile on shelving	Z-Sub level 1 Store Room (Room Z1/006)	Does not contain asbestos.
15.	NO000261	Debris/Residue to redundant pipe hanger	Z-Sub level 1 Switch Room (Room Z1/007)	Removed Sept 2023

16.	As NO000254	Cable braiding insulation	Z-Sub level 1 Switch Room (Room Z1/007)	Does not contain asbestos.
17.	NO000256	Fuses flashguards	Z-Sub level 1 Switch Room (Room Z1/007)	Contains asbestos - Any change in its appearance should be recorded and passed to Property Services.
Ç				
18.	NO000302	Door seal/gasket discarded on floor	Z-Sub level 1 Switch Room (Room Z1/007)	Does not contain asbestos.

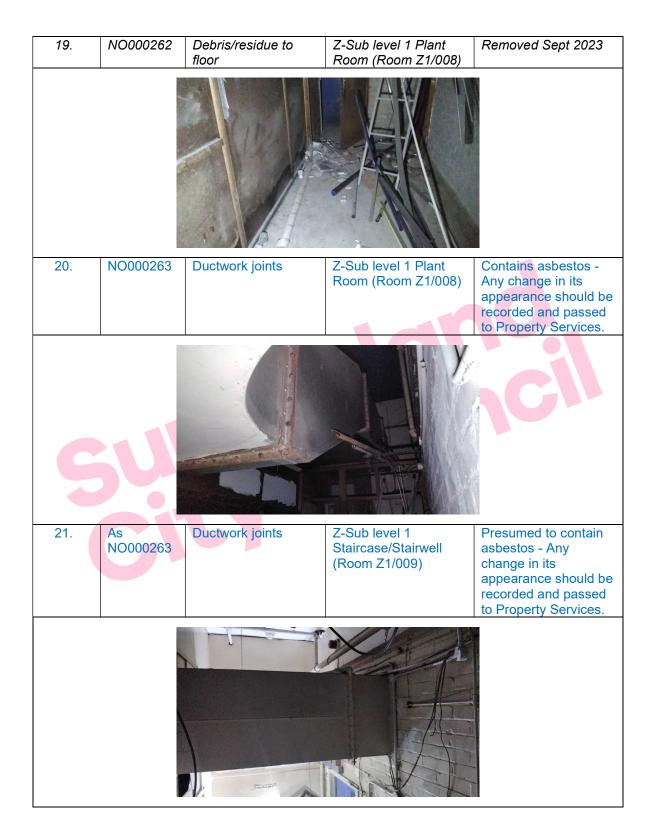




25.	NO000268	Floor tile	Z-Sub level 1 Store Room (Room Z1/010)	Does not contain asbestos.
26.	NO000269	Floor jointing compound	Z-Sub level 1 Store Room (Room Z1/014)	Does not contain asbestos.
27.	As NO000269	Floor jointing compound	Z-Sub level 1 Store Room (Room Z1/017)	Does not contain asbestos.

28.	NO000270	Floor tile red	Z-Sub level 1 Store Room (Room Z1/017)	Does not contain asbestos.
29.	As NO000269	Floor jointing compound	Z-Sub level 1 Tank Room (Room Z1/018)	Does not contain asbestos.
30.	NO000272	Floor tile cream	Z-Sub level 1 Tank Room (Room Z1/018)	Does not contain asbestos.

31.	As NO000256	Fuses/ flashguards	Z-Sub level 1 Tank Room (Room Z1/018)	Presumed to contain asbestos - Any change in its appearance should be recorded and passed to Property Services.
32.	NO000271	Pipework gaskets	Z-Sub level 1 Tank Room (Room Z1/018)	Contains asbestos - Any change in its appearance should be recorded and passed to Property Services.
Ç				
33.	As NO000271	Pipework gaskets	Z-Sub level 1 Tank Room (Room Z1/018)	Presumed to contain asbestos - Any change in its appearance should be recorded and passed to Property Services.
			2	

34.	NO000273	Debris/Residue	Z-Sub level 1 Tank Room (Room Z1/018)	Removed Sept 2023
35.	NO000274	Floor tile pink grey	Z-Sub level 1 Shop Floor (Room Z1/019)	Does not contain asbestos.
36.	Presumed	Pipework Gaskets to deeply recessed to sample	Z-Sub level 1 Shop Floor (Room Z1/019)	Presumed to contain asbestos - Any change in its appearance should be recorded and passed to Property Services.

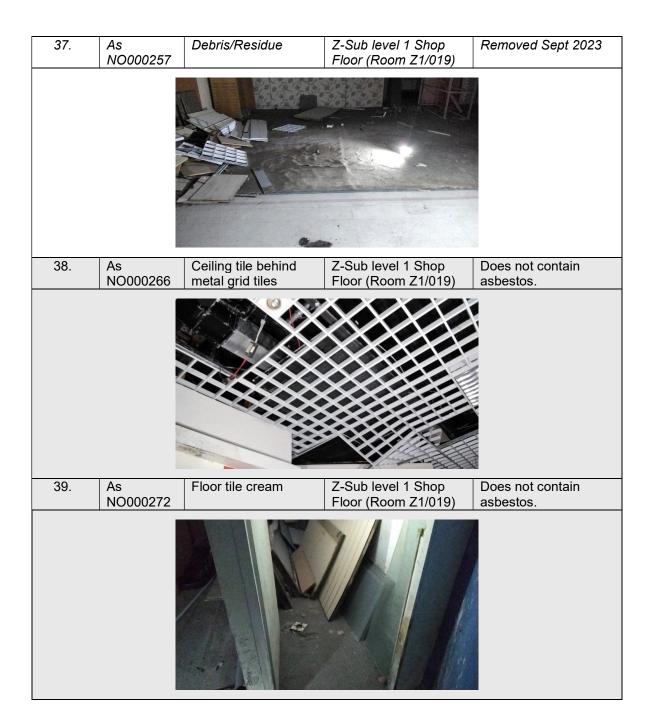

40.	As NO000267	Ductwork joints	Z-Sub level 1 Shop Floor (Room Z1/019)	Presumed to contain asbestos - Any change in its appearance should be recorded and passed to Property Services.
41.	As NO000251	Floor tile pink/grey	Z-Sub level 1 Staircase/Stairwell (Room Z1/020)	Does not contain asbestos.
42.	As NO000273	Debris/Reside to ceiling void and floor below	Z-Sub level 1 Store Room (Room Z1/021)	Removed Sept 2023

43.	Presumed	Pipework Gaskets	Z-Sub level 1 Store Room (Room Z1/021)	Presumed to contain asbestos - Any change in its appearance should be recorded and passed to Property Services.
44.	As NO000254	Cable braiding/insulation	Z-Sub level 1 Store Room (Room Z1/022)	Does not contain asbestos.
45.	As NO000256	Fuses flashguards	Z-Sub level 1 Store Room (Room Z1/023)	Presumed to contain asbestos - Any change in its appearance should be recorded and passed to Property Services.

46.	As NO000268	Floor tile	Z-Sub level 1 Store Room (Room Z1/023)	Does not contain asbestos.
47.	NO000275	Floor tile grey	Z-Sub level 1 Store Room (Room Z1/026)	Contains asbestos - Any change in its appearance should be recorded and passed to Property Services.
Ç				
48.	As NO000275	Floor tile grey	Z-Sub level 1 Store Room (Room Z1/027)	Presumed to contain asbestos - Any change in its appearance should be recorded and passed to Property Services.


49.	NO000276	Debris/Residue broken boards	Z-Sub level 1 Store Room (Room Z1/027)	Does not contain asbestos.	
50.	As NO000267	Ductwork joints	Z-Sub level 1 Store Room (Room Z1/027)	Presumed to contain asbestos - Any change in its appearance should be recorded and passed to Property Services.	
51.	NO000277	Fuses/flashguards inside fuses discarded throughout	Z-Sub level 1 Store Room (Room Z1/027)	Does not contain asbestos.	

52.	NO000278	Debris/residue to floor	Z-Sub level 1 Store Room (Room Z1/027)	Does not contain asbestos.		
53.	NO000279	Debris/residue to redundant hangers/equipment	Z-Sub level 1 Store Room (Room Z1/027)	Removed Sept 2023		
C						
54.	As NO000267	Ductwork joints	Z-Sub level 1 Plant Room (Room Z1/028)	Presumed to contain asbestos - Any change in its appearance should be recorded and passed to Property Services.		








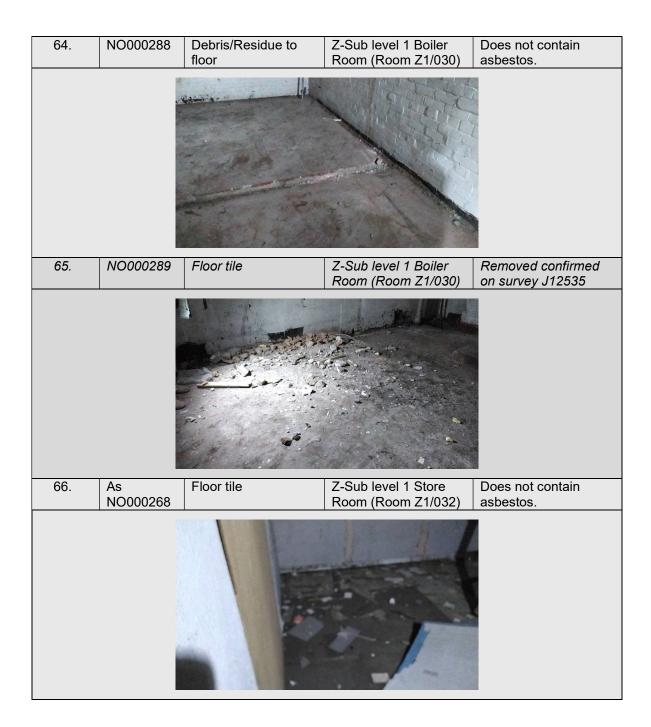






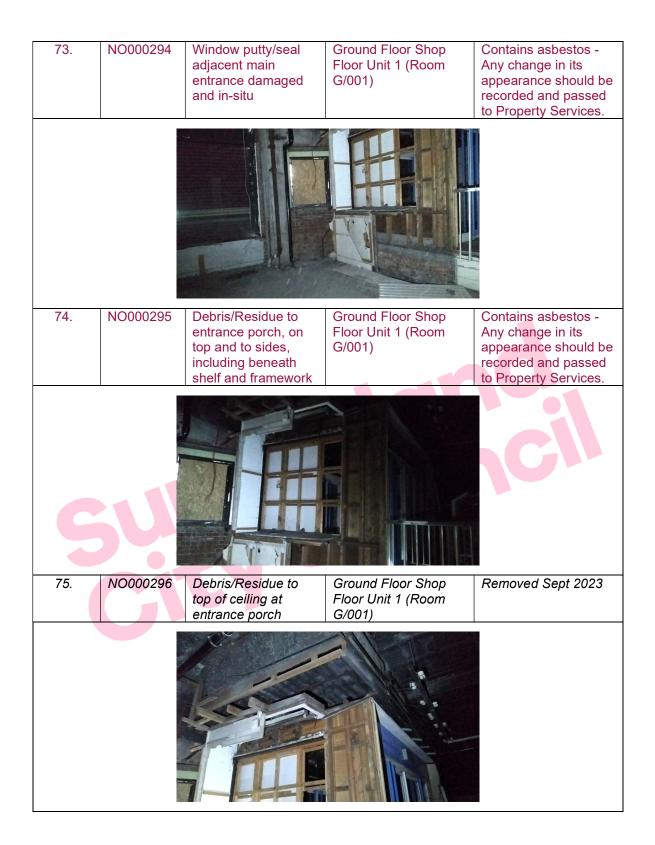

76.	NO000297	Ceiling tile including debris to floor	Ground Floor Shop Floor Unit 1 (Room G/001)	Does not contain asbestos.
77.	NO000298	Wall coating, rear wall beneath skim	Ground Floor Shop Floor Unit 1 (Room G/001)	Does not contain asbestos.
78.	NO000299	Floor tile brown surrounding columns	Ground Floor Shop Floor Unit 1 (Room G/001)	Contains asbestos - Any change in its appearance should be recorded and passed to Property Services.

79.	NO000300	Debris/Residue surrounding feet of columns	Ground Floor Shop Floor Unit 1 (Room G/001)	Removed Sept 2023
	Ň			
80.	As NO000300	Debris/Residue surrounding feet of columns	Ground Floor Shop Floor Unit 1 (Room G/001)	Removed Sept 2023
81.	NO000316	Floor nosing to stairs step up to window	Ground Floor Shop Floor Unit 1 (Room G/001)	Contains asbestos - Any change in its appearance should be recorded and passed to Property Services.

82.	As NO000295	Debris/Residue to floor	Ground Floor Porch Unit 1 (Room G/002)	Removed Sept 2023
83.	As NO000280	Ductwork joints	Ground Floor Porch Unit 1 (Room G/002)	Presumed to contain asbestos - Any change in its appearance should be recorded and passed to Property Services.
84.	As NO000293	Floor adhesive remnants	Ground Floor Store Room Unit 1 (Room G/003)	Presumed to contain asbestos - Any change in its appearance should be recorded and passed to Property Services.

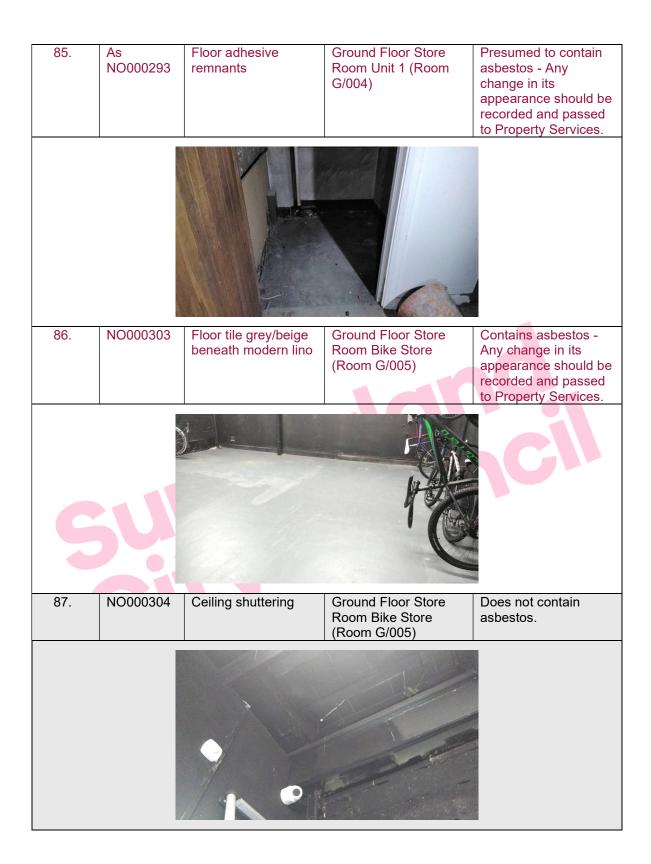



Photographs of Areas Sampled (cont)

91.	As NO000254	Cable braiding insulation	Ground Floor Switch Room behind lifts (Room G/009)	Does not contain asbestos.
92.	NO000306	Floor jointing compound	Ground Floor Switch Room behind lifts (Room G/009)	Does not contain asbestos.
93.	NO000307	Floor adhesive remnants beneath carpet	Ground Floor Hallway/passageway lift lobby (Room G/010)	Does not contain asbestos.


94.	NO000308	Debris/Residue to wall, mid landing	Ground Floor Staircase/Stairwell (Room G/012)	Does not contain asbestos.	
95.	NO000309	Debris/Residue	Ground Floor Staircase/Stairwell (Room G/014)	Removed Sept 2023	
	Ī				
96.	As NO000303	Floor tile grey/beige within electrical boxing to wall cavity and floor	Ground Floor Staircase/Stairwell (Room G/014)	Presumed to contain asbestos - Any change in its appearance should be recorded and passed to Property Services.	


97.	As NO000306	Floor jointing compound	Ground Floor Staircase/Stairwell (Room G/014)	Does not contain asbestos.
		F		
98.	As NO000303	Floor tile grey/beige carpet	Ground Floor Office (Room G/015)	Presumed to contain asbestos - Any change in its appearance should be recorded and passed to Property Services.
Ç				C
99.	As NO000306	Floor jointing compound	Ground Floor Store Room (Room G/017)	Does not contain asbestos.

100.	NO000310	Pipework insulation in wall penetration	Ground Floor Store Room (Room G/017)	Contains asbestos - Any change in its appearance should be recorded and passed to Property Services.
101.	As NO000307	Floor adhesive remnants	Ground Floor Store Room (Room G/017)	Does not contain asbestos.
102.	As NO000303	Floor tile grey/beige carpet	Ground Floor Store Room (Room G/017)	Presumed to contain asbestos - Any change in its appearance should be recorded and passed to Property Services.


103.	NO000311	Wall to nail/screw heads, various points on column	Ground Floor Store Room (Room G/017)	Does not contain asbestos.
104.	As NO000306	Floor jointing compound	Ground Floor Store Room unit 4 (Room G/018)	Does not contain asbestos.
105.	As NO000307	Floor adhesive remnants	Ground Floor Store Room unit 4 (Room G/018)	Does not contain asbestos.



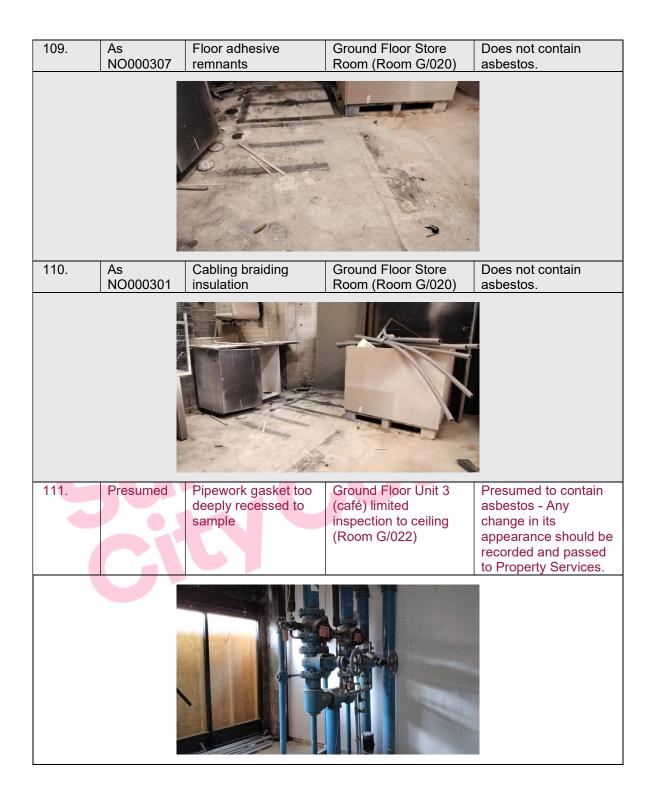


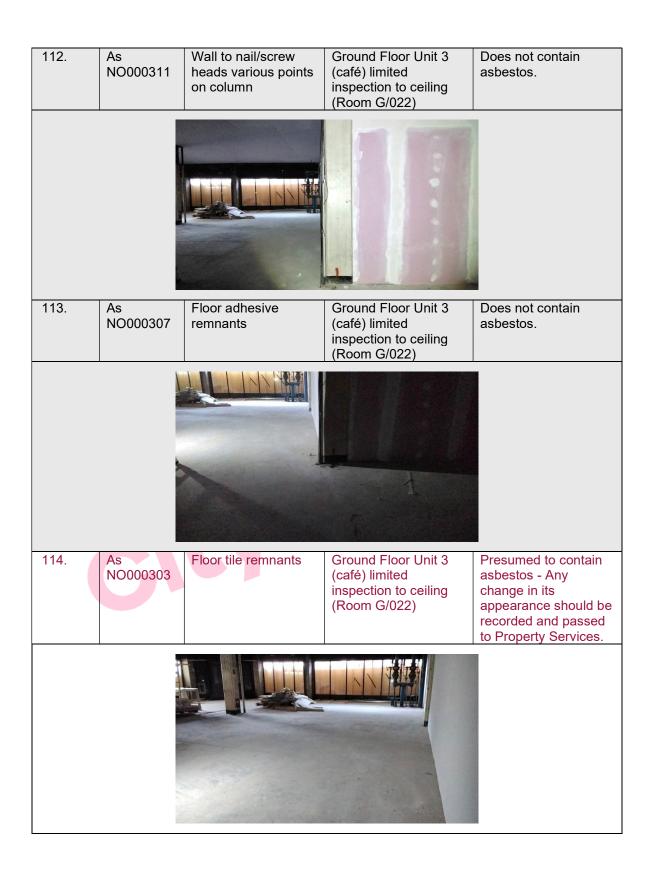



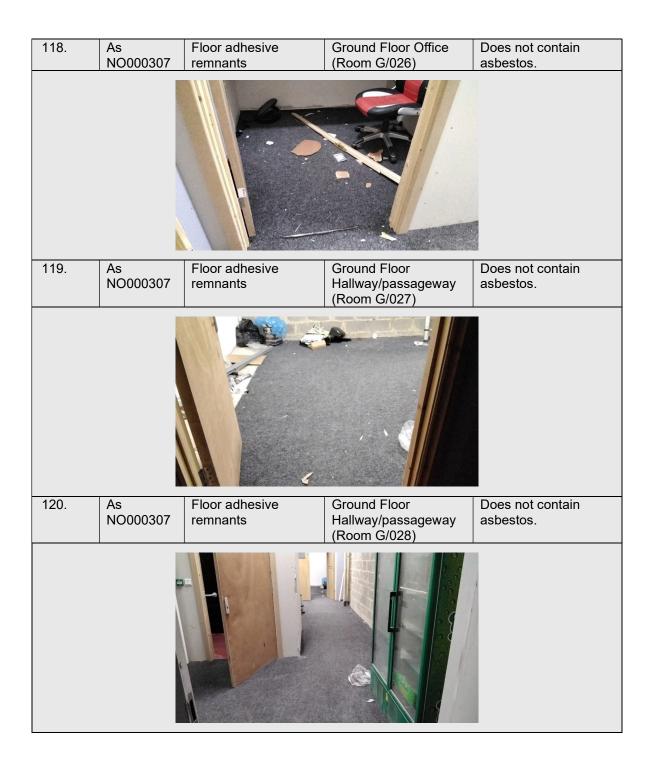

121.	NO000315	Ceiling tiles	Ground Floor Bin store (Room G/031)	Does not contain asbestos.
122.	As NO000307	Floor adhesive remnants	Ground Floor Bin store (Room G/031)	Does not contain asbestos.
123.	As NO000315	Ceiling tiles	Ground Floor Store Room (Room G/032)	Does not contain asbestos.

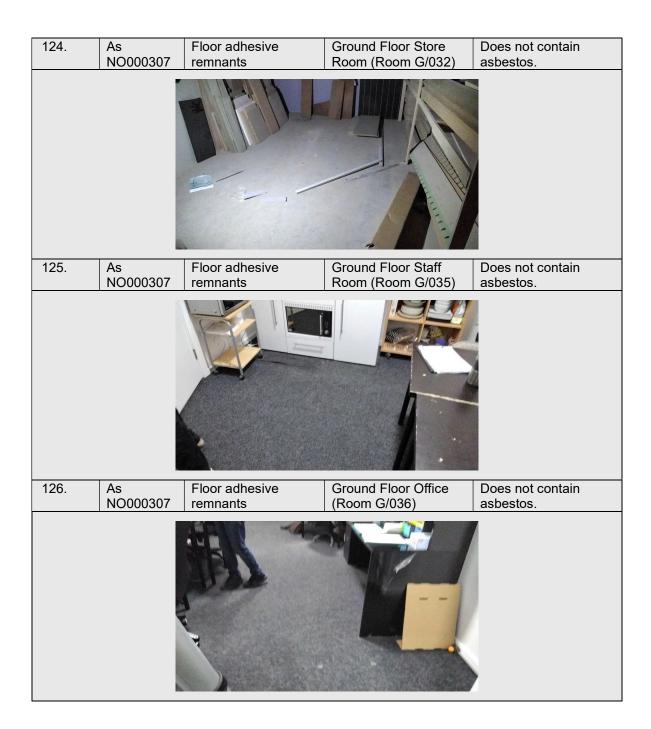

127.	As NO000307	Floor adhesive remnants	Ground Floor Entrance Hall/Foyer/Lobby (Room G/037)	Does not contain asbestos.
128.	As NO000307	Floor adhesive remnants	Ground Floor Hallway/Passageway (Room G/038)	Does not contain asbestos.
129.	NO000317	Floor tile to former shop floor and understairs area	Ground Floor Staircase/Stairwell (Room G/039)	Contains asbestos - Any change in its appearance should be recorded and passed to Property Services.

130.	As NO000307	Floor adhesive remnants	Ground Floor Staircase/Stairwell (Room G/039)	Does not contain asbestos.
131.	NO000318	Wall – within hole in wall under stairs	Ground Floor Staircase/Stairwell (Room G/039)	Does not contain asbestos.
132.	NO000319	Window putty/seal to discarded window	Ground Floor Staircase/Stairwell (Room G/039)	Contains asbestos - Any change in its appearance should be recorded and passed to Property Services.

133.	NO000320	Floor tile	First Floor Plant Room (Room 1/005)	Does not contain asbestos.
134.	NO000321	Floor tile beneath carpet	Second Floor Landing including stairs up (Room 2/001)	Does not contain asbestos.
135.	NO000321	Floor tile beneath carpet	Second Floor Landing (Room 2/003)	Does not contain asbestos.

136.	As NO000320	Floor tile	Second Floor Plant Room (Room 2/004)	Does not contain asbestos.
			Kingshan Kin	
137.	NO000322	Wall Coating	Second Floor Plant Room (Room 2/004)	Does not contain asbestos.
138.	NO000323	Wall void cavity	Second Floor Plant Room (Room 2/004)	Does not contain asbestos.



142.	NO000326	Debris/Residue to side stairs (external wall) including sloping runner	Second Floor Fire escape (Room 2/015)	Removed Sept 2023		
143.	NO000327	Floor nosing to stairs	Second Floor Fire escape (Room 2/015)	Contains asbestos - Any change in its appearance should be recorded and passed to Property Services.		
Ç						
144.	As NO000321	Floor tile beneath carpet	Second Floor Hallway/passageway (Room 2/016)	Does not contain asbestos.		


145.	As NO000321	Floor tile beneath carpet	Second Floor Hallway/passageway (Room 2/017)	Does not contain asbestos.
146.	As NO000321	Floor tile beneath carpet	Second Floor Store Room (Room 2/018)	Does not contain asbestos.
147.	NO000328	Pipework lining to insulation remnants	Second Floor Store Room (Room 2/018)	Removed Sept 2023



151.	NO000331	Ceiling void ceiling above panel	Third Floor Landing (Room 3/001)	Contains asbestos - Any change in its appearance should be recorded and passed to Property Services.
152.	NO000332	Wall tile	Third Floor Plant Room (Room 3/004)	Does not contain asbestos.
153.	NO000333	Debris/Residue to stairs	Third Floor Fire Escape (Room 3/016)	Contains asbestos - Any change in its appearance should be recorded and passed to Property Services.


154.	NO000334	Ceiling sloping Packing to girders	Third Floor Fire Escape (Room 3/016)	Does not contain asbestos.
155.	NO000328	Pipework lining to insulation remnants to 2 large pipes and floor	Third Floor Store Room (Room 3/021)	Removed Sept 2023
156.	Presumed	Pipework gaskets	Third Floor Store Room (Room 3/021)	Presumed to contain asbestos - Any change in its appearance should be recorded and passed to Property Services.




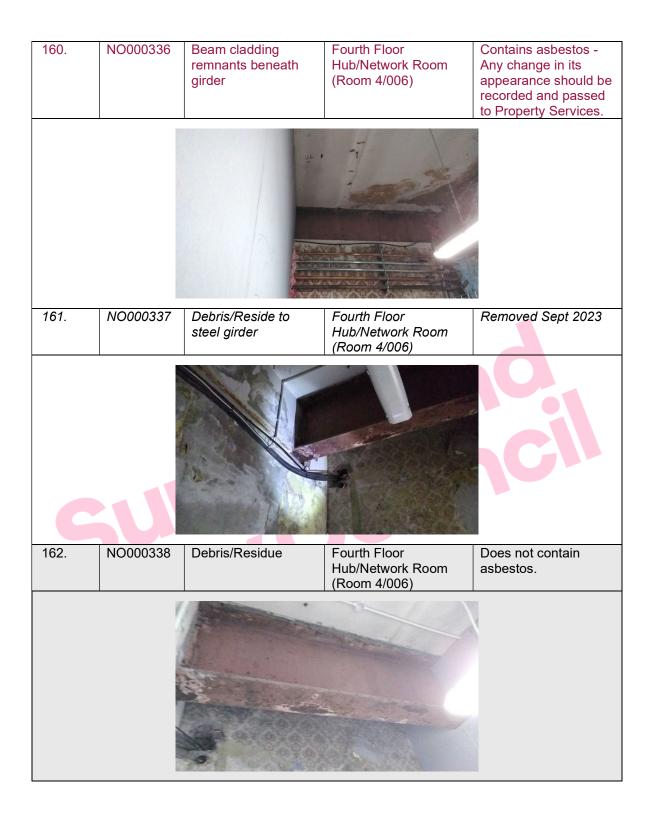

163.	As NO000336	Beam cladding remnants beneath girder	Fourth Floor Plant Room (Room 4/007)	Removed Sept 2023
164.	As NO000337	Debris/Reside to steel girder	Fourth Floor Plant Room (Room 4/007)	Removed Sept 2023
165.	As NO000338	Debris/Residue	Fourth Floor Plant Room (Room 4/007)	Does not contain asbestos.

166.	NO000339	Tank pacing to brackets	Fourth Floor Plant Room (Room 4/007)	Does not contain asbestos.
167.	NO000340	Damp proof course surrounding windows	Fourth Floor Plant Room (Room 4/007)	Does not contain asbestos.
168.	NO000341	Fuses/flashguards	Fourth Floor Lift Machinery Room (Room 4/008)	Contains asbestos - Any change in its appearance should be recorded and passed to Property Services.
	C			

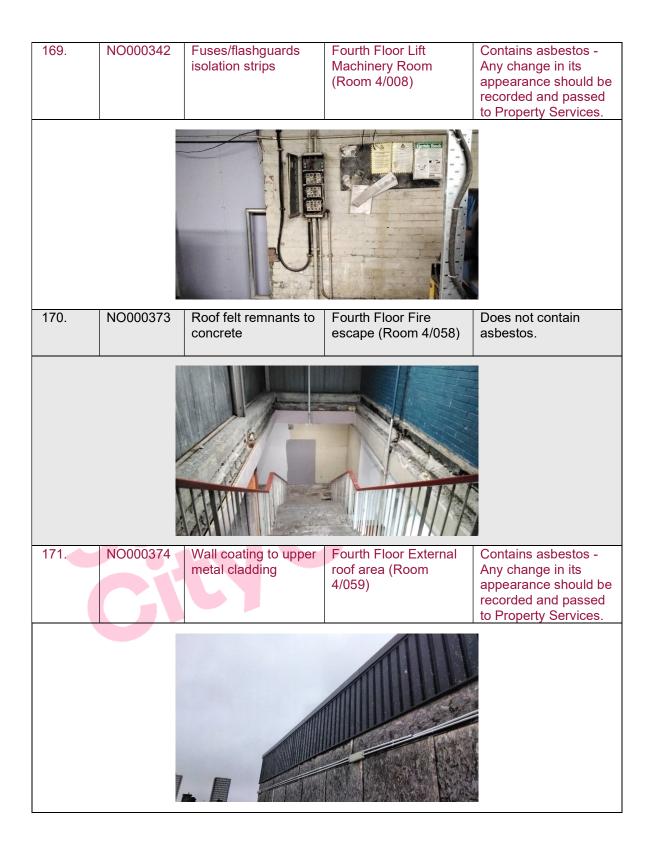

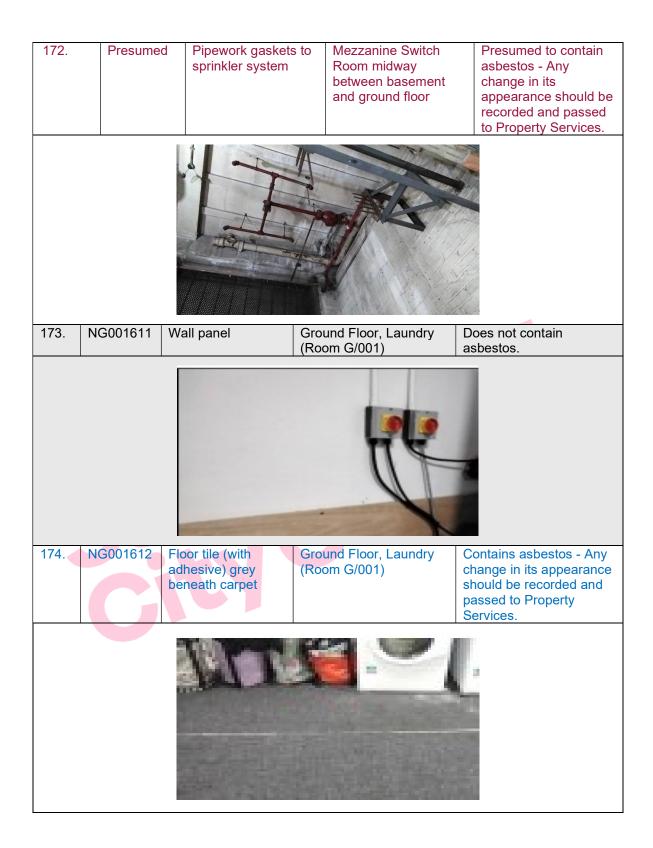

175.	NG001609	Wall panel	Ground Floor, Entrance Hall/Foyer/Lobby Main lift lobby (Room G/002)	Does not contain asbestos.
176.	NG001616	Ceiling	Ground Floor, Entrance Hall/Foyer/Lobby Main lift lobby (Room G/002)	Does not contain asbestos.
			-	
177.	As NG001609	Wall panel	First Floor, Entrance Hall/Foyer/Lobby Main lift lobby (Room 1/001)	Does not contain asbestos.

178.	As NG001616	Ceiling	First Floor, Entrance Hall/Foyer/Lobby Main lift lobby (Room 1/001)	Does not contain asbestos.
179.	As NG001609	Wall panel	First Floor, Entrance Hall/Foyer/Lobby next to northerly fire exit (Room 1/002)	Does not contain asbestos.
180.	As NG001602	Wall panel	Staircase/Stairwell (Room 1/003)	Does not contain asbestos.

181.	As NG001603	Floor tile (with adhesive) red	Staircase/Stairwell (Room 1/003)	Does not contain asbestos.
182.	As NG001604	Floor covering	Staircase/Stairwell (Room 1/003)	Does not contain asbestos.
183.	NG001610	Wall panel	Corridor west corridor (Room 1/004)	Does not contain asbestos.
			-	


184.	As NG001616	Ceiling	Corridor west corridor (Room 1/004)	Does not contain asbestos.
		-		
185.	As NG001610	Wall panel	Staircase/Stairwell (Room 1/005)	Does not contain asbestos.
186.	As NG001602	Wall panel	Bedroom 130 (Room 1/006)	Does not contain asbestos.

187.	As NG001596	Wall panel	Bedroom 214 (Room 1/007)	Does not contain asbestos.
188.	NG001600	Wall panel	Entrance Hall/Foyer/Lobby Lift lobby east (Room 2/001)	Does not contain asbestos.
189.	NG001602	Wall panel	Staircase/Stairwell North fire exit (Room 2/002)	Does not contain asbestos.

190.	NG001603	Floor tile with adhesive (red)	Staircase/Stairwell North fire exit (Room 2/002)	Does not contain asbestos.
191.	NG001604	Floor covering	Staircase/Stairwell North fire exit (Room 2/002)	Does not contain asbestos.
192.	As NG001602	Wall panel	Hallway/passageway Passage to Northerly fire exit (Room 2/003)	Does not contain asbestos.

193.	As NG001602	Wall panel	Bedroom 230 (Room 2/004)	Does not contain asbestos.
				I
194.	NG001605	Wall panel	Corridor East Corridor (Room 2/005)	Does not contain asbestos.
195.	NG001613	Ceiling	Corridor East Corridor (Room 2/005)	Does not contain asbestos.
			*	

196.	NG001606	Wall panel	Staircase/Stairwell (Room 2/006)	Does not contain asbestos.
197.	As NG001606	Wall panel	Kitchen adjacent service cupboard (Room 2/007)	Does not contain asbestos.
				•
198.	NG001607	Wall panel	Entrance Hall/Foyer/Lobby to emergency exit (Room 2/008)	Does not contain asbestos.
		-		

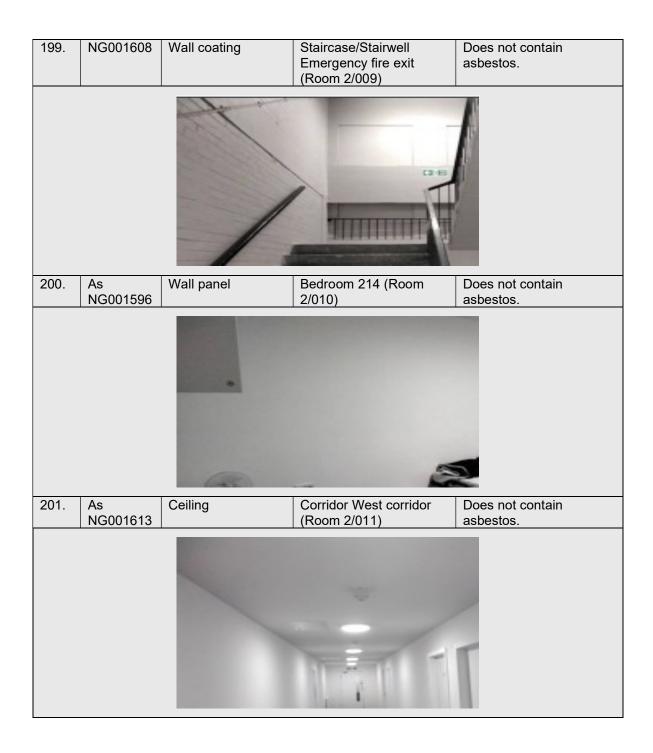

202.	NG001594	Wall panel	Staircase/Stairwell fire exit staircase (Room 3/001)	Does not contain asbestos.
		3	1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1	
203.	NG001595	Floor tile with adhesive	Staircase/Stairwell fire exit staircase (Room 3/001)	Does not contain asbestos.
204.	NG001596	Wall panel	Corridor East Corridor (Room 3/002)	Does not contain asbestos.
		F		

205.	NG001614	Ceiling coating	Corridor East Corridor (Room 3/002)	Does not contain asbestos.
206.	As NG001595	Floor tile with adhesive	Hallway/Passageway (Room 3/003)	Does not contain asbestos.
207.	NG001597	Wall panel	Staircase/Stairwell South stairwell (Room 3/004)	Does not contain asbestos.

208.	NG001598	Wall panel	Entrance Hall/Foyer/Lobby (Room 3/005)	Does not contain asbestos.
209.	NG001599	Wall panel	Staircase/Stairwell (Room 3/006)	Does not contain asbestos.
210.	As NG001599	Wall panel	Plant Room (Room 3/007)	Does not contain asbestos.

211.	NG001601	Wall panel	Bedroom 306 (Room 3/008)	Does not contain asbestos.
212.	As NG001602	Wall coating	Bedroom 330 (Room 3/009)	Does not contain asbestos.
213.	As NG001596	Wall panel	Corridor West Corridor (Room 3/010)	Does not contain asbestos.
			E	

214.	As NG001614	Ceiling coating	Corridor West Corridor (Room 3/010)	Does not contain asbestos.
215.	NG001588	Wall coating to brickwork	Entrance Hall/Foyer/Lobby (Room 4/001)	Does not contain asbestos.
216.	NG001589	Wall panel	Entrance Hall/Foyer/Lobby (Room 4/001)	Does not contain asbestos.
		•	Para Contractor de la c	

217.	NG001590	Wall panel	Bedroom 401 (Room 4/002)	Does not contain asbestos.
218.	NG001591	Wall panel	Bedroom 405 (Room 4/003)	Does not contain asbestos.
219.	NG001592	Wall panel	Corridor (Room 4/004)	Does not contain asbestos.

220.	NG001593	Wall coating	Stairs/Hall Landing Roof accessed (Room 4/005)	Contains asbestos - Any change in its appearance should be recorded and passed to Property Services.
221.	NG001615	Ceiling	Corridor (Room 4/006)	Does not contain asbestos.
222.	AW005669	Floor covering	Rear Stairwell adjacent Room 301 (Room 2/001)	Does not contain asbestos.



226.	As	Debris/Residue to	Loft space within crazy	Does not contain
	NZ001414	ceiling floor below	lobby (Room 1/002)	asbestos.
227.	NZ001415	Debris/Residue to ceiling floor below	Loft space within corridors to flats 106- 111 (Room 1/003)	Does not contain asbestos.
			The	
228.	As NZ001415	Debris/Residue to ceiling floor below	Loft space within corridor adjacent flat 110 (Room 1/004)	Does not contain asbestos.

229. NZ001416 Debris/Residue to Loft space within Does not contain ceiling floor below corridors to flats 112asbestos. 119 (Room 1/005) 230. As Debris/Residue to Loft space within Does not contain corridors to flats 120-NZ001416 ceiling floor below asbestos. 125 (Room 1/006) 231. NZ001417 Debris/Residue to Loft space within Does not contain corridors to flats 126ceiling floor below asbestos. 130 (Room 1/007)

232.	As NZ001417	Debris/Residue to ceiling floor below	Loft space within corridor adjacent flat 130 (Room 1/008)	Does not contain asbestos.
233.	NZ001418	Debris/Residue to ceiling floor below	Loft space within corridors to flats 101- 103 (Room 1/009)	Does not contain asbestos.
234.	As NZ001418	Debris/Residue to ceiling floor below	Loft space within corridors to flats 104- 105 (Room 1/010)	Does not contain asbestos.

235.	NZ001408	Debris/Residue to ceiling floor below	Loft space within lift lobby (Room 2/001)	Does not contain asbestos.
236.	As NZ001408	Debris/Residue to ceiling floor below	Loft space within gaming room lobby (Room 2/002)	Does not contain asbestos.
237.	NZ001409	Debris/Residue to ceiling floor below	Loft space within corridor to flats 207-208 (Room 2/003)	Does not contain asbestos.

238. Debris/Residue to Loft space within As Does not contain NZ001409 ceiling floor below corridor to flats 209-211 asbestos. (Room 2/004) 239. NZ001410 Does not contain Debris/Residue to Loft space within corridor adjacent flat 210 ceiling floor below asbestos. (Room 2/005) 240. Debris/Residue to Loft space within Does not contain As corridor to flats 212-219 NZ001410 ceiling floor below asbestos. (Room 2/006)

241. NZ001411 Debris/Residue to Loft space within Does not contain ceiling floor below corridor to flats 220-225 asbestos. (Room 2/007) 242. As Debris/Residue to Loft space within Does not contain corridor adjacent lift NZ001411 ceiling floor below asbestos. lobby (Room 2/008) 243. NZ001412 Debris/Residue to Loft space within Does not contain corridor to flats 226-230 ceiling floor below asbestos. (Room 2/009)

244.	As NZ001412	Debris/Residue to ceiling floor below	Loft space within corridor adjacent flat 230 (Room 2/010)	Does not contain asbestos.
245.	NZ001413	Debris/Residue to ceiling floor below	Loft space within corridor to flats 201-203 (Room 2/011)	Does not contain asbestos.
246.	As NZ001413	Debris/Residue to ceiling floor below	Loft space within corridor to flats 204-205 (Room 2/012)	Does not contain asbestos.
		Y C		

247.	NZ001403	Debris/Residue to ceiling floor below	Loft space within lobby (Room 3/001)	Does not contain asbestos.
248.	As NZ001403	Debris/Residue to ceiling floor below	Loft space within football pool room lobby (Room 3/002)	Does not contain asbestos.
249.	NZ001404	Debris/Residue to ceiling floor below	Loft space within corridor to flats 306-311 (Room 3/003)	Does not contain asbestos.

250.	As NZ001404	Debris/Residue to ceiling floor below	Loft space within corridor adjacent Flat 311 (Room 3/004)	Does not contain asbestos.
			Photo	
251.	NZ001405	Debris/Residue to ceiling floor below	Loft space within corridor to flats 312-319 (Room 3/005)	Does not contain asbestos.
252.	As NZ001405	Debris/Residue to ceiling floor below	Loft space within corridor to flats 320-325 (Room 3/006)	Does not contain asbestos.

253.	As NZ001404	Debris/Residue to ceiling floor below	Loft space within corridor adjacent Flat 321 (Room 3/007)	Does not contain asbestos.
		Little on a		
254.	NZ001406	Debris/Residue to ceiling floor below	Loft space within corridor to flats 326-330 (Room 3/008)	Does not contain asbestos.
255.	As NZ001406	Debris/Residue to ceiling floor below	Loft space within corridor adjacent flat 330 (Room 3/009)	Does not contain asbestos.

256. NZ001407 Debris/Residue to Loft space within Does not contain ceiling floor below corridor to flats 301-304 asbestos. (Room 3/010) 257. As Debris/Residue to Loft space within Does not contain NZ001407 ceiling floor below corridor to flats 301-304 asbestos. (Room 3/011) 258. NZ001401 Debris/Residue to Loft space within Does not contain corridor to flats 413-414 ceiling floor below asbestos. (Room 4/001)

259.	As NZ001401	Debris/Residue to ceiling floor below	Loft space within corridor to flats 408-412 (Room 4/002)	Does not contain asbestos.
		E.F.		
		16st	STATE AND	
		ST. ST		
260.	NZ001402	Debris/Residue to ceiling floor below	Loft space within corridor to flats 415-416 (Room 4/003)	Does not contain asbestos.
261.	As NZ001402	Debris/Residue to ceiling floor below	Loft space within corridor to flats 403-407 (Room 4/004)	Does not contain asbestos.

262.	EV005969	Textured coated wall & debris to ceiling loft space where the wall had been damaged to ducting installation	Loft space/Ceiling void (R/01)	Does not contain asbestos.



Five Simple Steps to Asbestos Management

Each property has a nominated site asbestos monitoring officer (SAMO). The SAMO is responsible for maintaining this register and ensuring all necessary personnel are aware of the register including all maintenance, construction and service installers; undertaking periodic inspections and liasing with the Departmental Asbestos Co-ordinator and the Asbestos Manager in Property Services as necessary.

The SAMO's role is very important but this guide is hoped to ensure the requirements are easy and simple to follow.

Step 1 – Receiving the Register

The SAMO is the tenant.

And the person is responsible for the register, where it is located and that it is kept up to date.

The register contains a plan of the premises and a photographic schedule of where the asbestos is and what risk is associated.

The SAMO must make all employees aware of the locations and should let any contractors entering the building view the register before any work is started.

Step 2 – Periodic Inspections

The SAMO must look at the locations photographed and compare the asbestos now to when the photograph was taken and complete the checklist attached (Form 2).

The checklists are to be completed periodically in accordance with the schedule attached.

Should the SAMO come across some asbestos which has been disturbed, whether during refurbishment works or during the normal course of wear and tear, they should complete Form 4 as far as possible and contact Property Services for advice and remedial action.

In the meantime, they should ensure that access to the area containing the disturbed or damaged asbestos is prohibited until Property Services has made recommendations.

Step 3 – Planned Work

All planned works that may disturb or danger any asbestos indicated, should be reported to Property Services using form 3 at <u>least 21 days</u> before the work is due to commence.

<u>Step 4 – Contractors on Site</u>

If a contractor arrives on site, the SAMO must :

- a. Make sure they read/view the register
- b. Get contractor to sign register to say he has read it (Form1).
- c. Get confirmation from the contractor that proposed works will not disturb any asbestos areas.
- d. If area is disturbed that was not identified in Register, advise Property Services immediately and complete Form 4.

<u>Step 5 – Monitoring the Register</u>

On completion of work get contractor to sign to say they didn't disturb any areas.

If alterations have occurred details should be forwarded to Property Services.

If you, as SAMO, are to leave your post, please notify your Departmental Coordinator to appoint another person and notify Property Services and the front of your register.

In the event of an exposure of asbestos, please refer to your site specific emergency procedures. However, as a minimum:

- Seal the area off completely. (Lock the area off if possible and post a notice on the door, "No access Contact")
- If there is any air movement systems within the premises, shut it off.
- Contact the Asbestos Manager on 07557 938966 immediately. Who will arrange for any remedial works / air monitoring.
- Start to complete the "Registration of Disturbances" form, which is in your register (Section 10 in the new style register).

Once the remedial works have been carried out and a clear air test certificate has been issued. Access to the area can be re-opened.

In the event that you are unable to contact the Asbestos Manager, please contact the Civic Centre on 520 5555 and ask for assistance from a building surveyor. Out of hours ring the City Alarm and Emergency Control room on 553 1999.

Central Safety can be contacted on 561 2311.

In the event of a fire (or drill), the asbestos register must be taken outside to show the emergency services.

Commonly Asked Questions.

 How often should SAMO's undertake inspections of asbestos containing materials?
The Asbestos Manager will inform the SAMO of how often the

The Asbestos Manager will inform the SAMO of how often the inspections should be undertaken.

• What should a SAMO do if the asbestos containing materials are disturbed or damaged?

The SAMO should prohibit access to the areas until the Asbestos Manager in Property Services has been contacted and given recommendations.

• Can employees put up decorations onto asbestos containing materials?

No decorations should be attached to asbestos containing materials. However, it is understood that some decoration is already attached to asbestos containing materials and these should be left in place.

• Can a room with asbestos containing materials in the ceiling and wall be painted?

Yes, as long as the material is not rubbed or sanded down, as this may result in the release of asbestos fibres.

- Why isn't all asbestos containing materials removed from buildings? Because it is safer to leave asbestos containing materials in good condition in buildings. Removing the materials will result in a greater risk to health because of the consequential release of fibres.
- When will asbestos containing material be removed from my building?

Asbestos containing materials will be removed if work involves the disturbance of the material e.g. during the refurbishment or dismantling of part of the building or structure.

• What should a SAMO do if he/she has had no training in use of the register?

The SAMO should ring the Departmental Co-ordinator who will arrange training.

INSPECTION SCHEDULE

ltem No.	Area Sampled	Location Name	Inspection Frequency	Date of Return	Condition Same/change	Action Required Y/N	Comments
1.	Floor tiles Grey/pink	Z-Sub level 1 Shop Floor (Room Z1/001)	No Risk				
2.	Debris/Residue to ceiling void and floor	Z-Sub level 1 Shop Floor (Room Z1/001)	This item is classed as low risk and should be inspected every 6 months	N/A	N/A	N/A	Removed Sept 2023
3.	Pipework Gaskets	Z-Sub level 1 Shop Floor (Room Z1/001)	No Risk				
4.	Pipework Gaskets to deeply recessed to sample	Z-Sub level 1 Shop Floor (Room Z1/001)	This item is classed as very low risk and should be inspected every 12 months	05/07/26			
5.	Cable braiding insulation	Z-Sub level 1 Shop Floor (Room Z1/001)	No Risk				
6.	Cable braiding insulation	Z-Sub level 1 Shop Floor (Room Z1/001)	No Risk				
7.	Fuses flashguards	Z-Sub level 1 Shop Floor (Room Z1/001)	This item is classed as very low risk and should be inspected every 12 months	05/07/26			
8.	Debris/Residue	Z-Sub level 1 Shop Floor (Room Z1/001)	This item is classed as very low risk and should be inspected every 12 months	N/A	N/A	N/A	Removed Sept 2023
9.	Debris/Residue from boiler room entrance across to stairs and adjacent areas	Z-Sub level 1 Shop Floor (Room Z1/001)	This item should be removed by a licensed contractor asap	N/A	N/A	N/A	Removed Sept 2023
10.	Debris/Residue to redundant pump	Z-Sub level 1 Shop Floor (Room Z1/001)	No Risk				

11.	Debris/Residue to floor adjacent stairwell	Z-Sub level 1 Shop Floor (Room Z1/001)	This item should be removed by a licensed contractor asap	N/A	N/A	N/A	Removed Sept 2023
12.	Ceiling tile behind metal grid tiles	Z-Sub level 1 Shop Floor (Room Z1/001)	No Risk				
13.	Ductwork joints	Z-Sub level 1 Shop Floor (Room Z1/001)	This item is classed as low risk and should be inspected every 6 months	05/01/26			
14.	Floor tile on shelving	Z-Sub level 1 Store Room (Room Z1/006)	No Risk				
15.	Debris/Residue to redundant pipe hanger	Z-Sub level 1 Switch Room (Room Z1/007)	This item should be removed by a licensed contractor asap	N/A	N/A	N/A	Removed Sept 2023
16.	Cable braiding insulation	Z-Sub level 1 Switch Room (Room Z1/007)	No Risk				
17.	Fuses flashguards	Z-Sub level 1 Switch Room (Room Z1/007)	This item is classed as very low risk and should be inspected every 12 months	05/07/26			
18.	Door seal/gasket discarded on floor	Z-Sub level 1 Switch Room (Room Z1/007)	No Risk				
19.	Debris/residue to floor	Z-Sub level 1 Plant Room (Room Z1/008)	This item should be removed by a licensed contractor asap	N/A	N/A	N/A	Removed Sept 2023
20.	Ductwork joints	Z-Sub level 1 Plant Room (Room Z1/008)	This item should be removed by a licensed contractor asap	05/01/26			
21.	Ductwork joints	Z-Sub level 1 Staircase/Stairwell (Room Z1/009)	This item is classed as low risk and should be inspected every 6 months	05/01/26			
22.	Wall	Z-Sub level 1	This item should be	05/01/26	Encapsulate		

		Staircase/Stairwell	removed by a				
		(Room Z1/009)	licensed contractor				
			asap				
23.	Debris/Residue foot	Z-Sub level 1	This item should be	N/A	N/A	N/A	Removed Sept 2023
	of stairwell and	Staircase/Stairwell	removed by a				
	adjacent areas	(Room Z1/009)	licensed contractor				
			asap				
24.	Cable braiding	Z-Sub level 1	No Risk				
	insulation remnants	Staircase/Stairwell					
	to wall	(Room Z1/009)					
25.	Floor tile	Z-Sub level 1 Store	No Risk				
		Room (Room Z1/010)					
26.	Floor jointing	Z-Sub level 1 Store	No Risk				
	compound	Room (Room Z1/014)					
27.	Floor jointing	Z-Sub level 1 Store	No Risk				
	compound	Room (Room Z1/017)					
28.	Floor tile red	Z-Sub level 1 Store	No Risk				
		Room (Room Z1/017)					
29.	Floor jointing	Z-Sub level 1 Tank	No Risk				
	compound	Room (Room Z1/018)					
30.	Floor tile cream	Z-Sub level 1 Tank	No Risk				
		Room (Room Z1/018)					
31.	Fuses flashguards	Z-Sub level 1 Tank	This item is classed	05/07/26			
		Room (Room Z1/018)	as very low risk and				
			should be inspected				
			every 12 months				
32.	Pipework gaskets	Z-Sub level 1 Tank	This item is classed	05/07/26			
		Room (Room Z1/018)	as very low risk and				
			should be inspected				
			every 12 months	0.5/0.4/0.0			
33.	Pipework gaskets	Z-Sub level 1 Tank	This item is classed	05/01/26			
		Room (Room Z1/018)	as low risk and				
			should be inspected				
			every 6 months				
34.	Debris/Residue	Z-Sub level 1 Tank	This item is classed	N/A	N/A	N/A	Removed Sept 2023
		Room (Room Z1/018)	as very low risk and				

			should be inspected every 12 months				
35.	Floor tile pink grey	Z-Sub level 1 Shop Floor (Room Z1/019)	No Risk				
36.	Pipework Gaskets to deeply recessed to sample	Z-Sub level 1 Shop Floor (Room Z1/019)	This item is classed as very low risk and should be inspected every 12 months	05/07/26			
37.	Debris/Residue	Z-Sub level 1 Shop Floor (Room Z1/019)	This item is classed as very low risk and should be inspected every 12 months	N/A	N/A	N/A	Removed Sept 2023
38.	Ceiling tile behind metal grid tiles	Z-Sub level 1 Shop Floor (Room Z1/019)	No Risk				
39.	Floor tile cream	Z-Sub level 1 Shop Floor (Room Z1/019)	No Risk				
40.	Ductwork joints	Z-Sub level 1 Shop Floor (Room Z1/019)	This item is classed as low risk and should be inspected every 6 months	05/01/26	n		
41.	Floor tile pink/grey	Z-Sub level 1 Staircase/Stairwell (Room Z1/020)	No Risk				
42.	Debris/Reside to ceiling void and floor below	Z-Sub level 1 Store Room (Room Z1/021)	This item is classed as very low risk and should be inspected every 12 months	N/A	N/A	N/A	Removed Sept 2023
43.	Pipework Gaskets	Z-Sub level 1 Store Room (Room Z1/021)	This item is classed as very low risk and should be inspected every 12 months	05/07/26			
44.	Cable braiding/insulation	Z-Sub level 1 Store Room (Room Z1/022)	No Risk				
45.	Fuses flashguards	Z-Sub level 1 Store Room (Room Z1/023)	This item is classed as very low risk and should be inspected every 12 months	05/07/26			

46.	Floor tile	Z-Sub level 1 Store Room (Room Z1/023)	No Risk				
47.	Floor tile grey	Z-Sub level 1 Store Room (Room Z1/026)	This item is classed as very low risk and should be inspected every 12 months	05/07/26			
48.	Floor tile grey	Z-Sub level 1 Store Room (Room Z1/027)	This item is classed as very low risk and should be inspected every 12 months	05/07/26			
49.	Debris/Residue broken boards	Z-Sub level 1 Store Room (Room Z1/027)	No Risk				
50.	Ductwork joints	Z-Sub level 1 Store Room (Room Z1/027)	This item is classed as low risk and should be inspected every 6 months	05/01/26		5	
51.	Fuses/flashguards inside fuses discarded throughout	Z-Sub level 1 Store Room (Room Z1/027)	No Risk				
52.	Debris/residue to floor	Z-Sub level 1 Store Room (Room Z1/027)	No Risk				
53.	Debris/residue to redundant hangers/equipment	Z-Sub level 1 Store Room (Room Z1/027)	This item should be removed by a licensed contractor asap	N/A	N/A	N/A	Removed Sept 2023
54.	Ductwork joints	Z-Sub level 1 Plant Room (Room Z1/028)	This item is classed as very low risk and should be inspected every 12 months	05/07/26			
55.	Ductwork joints	Z-Sub level 1 Store Room (Room Z1/029)	This item should be removed by a licensed contractor asap	05/01/26			
56.	Ductwork joints red/brown mastic	Z-Sub level 1 Store Room (Room Z1/029)	This item is classed as very low risk and should be inspected	05/07/26			

			every 12 months				
57.	Floor tile	Z-Sub level 1 Store Room (Room Z1/029)	No Risk				
58.	Debris/Residue to wall left of entrance	Z-Sub level 1 Boiler Room (Room Z1/030)	This item should be removed by a licensed contractor asap	N/A	N/A	N/A	Removed Sept 2023
59.	Debris/Residue to left wall	Z-Sub level 1 Boiler Room (Room Z1/030)	This item should be removed by a licensed contractor asap	N/A	N/A	N/A	Removed Sept 2023
60.	Ceiling Shuttering	Z-Sub level 1 Boiler Room (Room Z1/030)	This item is classed as very low risk and should be inspected every 12 months	05/07/26	Remove		
61.	Debris/Residue surrounding holes for flues	Z-Sub level 1 Boiler Room (Room Z1/030)	No Risk				
62.	Debris/Residue to rear RHS wall	Z-Sub level 1 Boiler Room (Room Z1/030)	This item is classed as a medium risk and should be inspected every 3 months	N/A	N/A	N/A	Removed Sept 2023
63.	Debris/Residue to floor	Z-Sub level 1 Boiler Room (Room Z1/030)	This item should be removed by a licensed contractor asap	N/A	N/A	N/A	Removed Sept 2023
64.	Debris/Residue to floor	Z-Sub level 1 Boiler Room (Room Z1/030)	No Risk				
65.	Floor tile	Z-Sub level 1 Boiler Room (Room Z1/030)	This item should be removed by a licensed contractor asap	N/A	Removed		
66.	Floor tile	Z-Sub level 1 Store Room (Room Z1/032)	No Risk				
67.	Pipework gasket	Z-Sub level 1 Store Room (Room Z1/032)	This item is classed as very low risk and should be inspected	05/07/26			

			every 12 months				
68.	Pipework wrap to	Z-Sub level 1 Store	This item is classed	05/07/26			
	pipe penetrations in	Room (Room Z1/032)	as very low risk and				
	ceiling		should be inspected				
	5		every 12 months				
69.	Floor tile pink/grey	Z-Sub level 1 Stairwell	No Risk				
	including debris up	Staircase (Room					
	the stairs	Z1/034)					
Area	as above basement	t to be inspected by N	lanagement Comp	any			
70.	Floor tile red	Ground Floor Shop	This item is classed	05/07/24			
		Floor Unit 1 (Room	as very low risk and				
		G/001)	should be inspected				
		,	every 12 months				
71.	Floor tile grey	Ground Floor Shop	This item is classed	05/07/24			
		Floor Unit 1 (Room	as very low risk and				
		G/001)	should be inspected				
		,	every 12 months				
72.	Floor adhesive	Ground Floor Shop	This item is classed	05/07/24			
	remnants	Floor Unit 1 (Room	as very low risk and				
		G/001)	should be inspected				
			every 12 months				
73.	Window putty/seal	Ground Floor Shop	This item is classed	05/07/24			
	adjacent main	Floor Unit 1 (Room	as very low risk and				
	entrance damaged	G/001)	should be inspected				
	and in-situ		every 12 months				
74.	Debris/Residue to	Ground Floor Shop	This item is classed	05/07/24			
	entrance porch, on	Floor Unit 1 (Room	as very low risk and				
	top and to sides,	G/001)	should be inspected				
	including beneath		every 12 months				
	shelf and framework						
75.	Debris/Residue to	Ground Floor Shop	This item should be	N/A	N/A	N/A	Removed Sept 2023
	top of ceiling at	Floor Unit 1 (Room	removed by a				
	entrance porch	G/001)	licensed contractor				
			asap				
76.	Ceiling tile including	Ground Floor Shop	No Risk				
	debris to floor	Floor Unit 1 (Room					

		G/001)					
77.	Wall coating, rear	Ground Floor Shop	No Risk				
	wall beneath skim	Floor Unit 1 (Room					
		G/001)					
78.	Floor tile brown	Ground Floor Shop	This item is classed	05/07/24			
	surrounding	Floor Unit 1 (Room	as very low risk and				
	columns	G/001)	should be inspected				
			every 12 months				
79.	Debris/Residue	Ground Floor Shop	This item should be	N/A	N/A	N/A	Removed Sept 2023
	surrounding feet of	Floor Unit 1 (Room	removed by a				
	columns	G/001)	licensed contractor				
			asap				
80.	Debris/Residue	Ground Floor Shop	This item should be	N/A	N/A	N/A	Removed Sept 2023
	surrounding feet of	Floor Unit 1 (Room	removed by a				
	columns	G/001)	licensed contractor				
			asap				
81.	Floor nosing to	Ground Floor Shop	This item is classed	05/07/24			
	stairs step up to	Floor Unit 1 (Room	as very low risk and				
	window	G/001)	should be inspected				
			every 12 months				-
82.	Debris/Residue to	Ground Floor Porch Unit	This item is classed	N/A	N/A	N/A	Removed Sept 2023
	floor	1 (Room G/002)	as very low risk and				
			should be inspected				
	D		every 12 months	05/04/04			
83.	Ductwork joints	Ground Floor Porch Unit	This item is classed	05/01/24			
		1 (Room G/002)	as low risk and				
			should be inspected				
0.4	Floor adhesive	Ground Floor Store	every 6 months This item is classed	05/07/04			
84.		-		05/07/24			
	remnants	Room Unit 1 (Room	as very low risk and				
		G/003)	should be inspected				
85.	Floor adhesive	Ground Floor Store	every 12 months This item is classed	05/07/24			
00.	remnants	Room Unit 1 (Room	as very low risk and	03/07/24			
	Terrinarits	G/004)	should be inspected				
		(()))	every 12 months				
86.	Floor tile grey/beige	Ground Floor Store	This item is classed	05/07/24			
00.	i loor tile grey/belge			00/01/24	l	l	

	beneath modern lino	Room Bike Store (Room G/005)	as very low risk and should be inspected every 12 months				
87.	Ceiling shuttering	Ground Floor Store Room Bike Store (Room G/005)	No Risk				
88.	Tile grey/beige beneath carpet	Ground Floor Laboratory (Room G/007)	This item is classed as very low risk and should be inspected every 12 months	05/07/24			
89.	Tile grey/beige beneath modern lino	Ground Floor Hallway/passageway Switch Room (Room G/008)	This item is classed as very low risk and should be inspected every 12 months	05/07/24	no		
90.	Pipework Gasket	Ground Floor Hallway/passageway Switch Room (Room G/008)	No Risk				
91.	Cable braiding insulation	Ground Floor Switch Room behind lifts (Room G/009)	No Risk				
92.	Floor jointing compound	Ground Floor Switch Room behind lifts (Room G/009)	No Risk				
93.	Floor adhesive remnants beneath carpet	Ground Floor Hallway/passageway lift lobby (Room G/010)	No Risk				
94.	Debri/Residue to wall, mid landing	Ground Floor Staircase/Stairwell (Room G/012)	No Risk				
95.	Debris/Residue	Ground Floor Staircase/Stairwell (Room G/014)	This item should be removed by a licensed contractor asap	N/A	N/A	N/A	Removed Sept 2023
96.	Floor tile grey/beige within electrical boxing to wall cavity	Ground Floor Staircase/Stairwell (Room G/014)	This item is classed as very low risk and should be inspected	05/07/24			

	and floor		every 12 months				
97.	Floor jointing compound	Ground Floor Staircase/Stairwell (Room G/014)	No Risk				
98.	Floor tile grey/beige carpet	Ground Floor Office (Room G/015)	This item is classed as very low risk and should be inspected every 12 months	05/07/24			
99.	Floor jointing compound	Ground Floor Store Room (Room G/017)	No Risk				
100.	Pipework insulation in wall penetration	Ground Floor Store Room (Room G/017)	This item is classed as low risk and should be inspected every 6 months	05/01/24	no		
101.	Floor adhesive remnants	Ground Floor Store Room (Room G/017)	No Risk				
102.	Floor tile grey/beige carpet	Ground Floor Store Room (Room G/017)	This item is classed as very low risk and should be inspected every 12 months	05/07/24	m ^c		
103.	Wall to nail/screw heads, various points on column	Ground Floor Store Room (Room G/017)	No Risk				
104.	Floor jointing compound	Ground Floor Store Room unit 4 (Room G/018)	No Risk				
105.	Floor adhesive remnants	Ground Floor Store Room unit 4 (Room G/018)	No Risk				
106.	Pipework insulation packing to former wall penetration	Ground Floor Store Room unit 4 (Room G/018)	This item should be removed by a licensed contractor asap	N/A			
107.	Residue/Debris to floor	Ground Floor Store Room unit 4 (Room G/018)	This item should be removed by a licensed contractor asap	N/A	N/A	N/A	Removed Sept 2023

108.	Floor jointing compound	Ground Floor Store Room (Room G/020)	No Risk				
109.	Floor adhesive remnants	Ground Floor Store Room (Room G/020)	No Risk				
110.	Cabling braiding insulation	Ground Floor Store Room (Room G/020)	No Risk				
111.	Pipework gasket too deeply recessed to sample	Ground Floor Unit 3 (café) limited inspection to ceiling (Room G/022)	This item is classed as very low risk and should be inspected every 12 months	05/07/24			
112.	Wall to nail/screw heads various points on column	Ground Floor Unit 3 (café) limited inspection to ceiling (Room G/022)	No Risk				
113.	Floor adhesive remnants	Ground Floor Unit 3 (café) limited inspection to ceiling (Room G/022)	No Risk				
114.	Floor tile remnants	Ground Floor Unit 3 (café) limited inspection to ceiling (Room G/022)	This item is classed as very low risk and should be inspected every 12 months	05/07/24	m.		
115.	Floor adhesive remnants	Ground Floor Shop Floor former store entrance (Room G/023)	No Risk				
116.	Floor tile remnants	Ground Floor Shop Floor former store entrance (Room G/023)	This item is classed as very low risk and should be inspected every 12 months	05/07/24			
117.	Debris/Residue to both floor voids adjacent front doors also on roller shutter	Gr <mark>ound Floo</mark> r Shop Floor former store entrance (Room G/023)	This item is classed as very low risk and should be inspected every 12 months	N/A	N/A	N/A	Removed Sept 2023
118.	Floor adhesive remnants	Ground Floor Office (Room G/026)	No Risk				
119.	Floor adhesive remnants	Ground Floor Hallway/passageway (Room G/027)	No Risk				

120.	Floor adhesive remnants	Ground Floor Hallway/passageway (Room G/028)	No Risk			
121.	Ceiling tiles	Ground Floor Bin store (Room G/031)	No Risk			
122.	Floor adhesive remnants	Ground Floor Bin store (Room G/031)	No Risk			
123.	Ceiling tiles	Ground Floor Store Room (Room G/032)	No Risk			
124.	Floor adhesive remnants	Ground Floor Store Room (Room G/032)	No Risk			
125.	Floor adhesive remnants	Ground Floor Staff Room (Room G/035)	No Risk			
126.	Floor adhesive remnants	Ground Floor Office (Room G/036)	No Risk			
127.	Floor adhesive remnants	Ground Floor Entrance Hall/Foyer/Lobby (Room G/037)	No Risk			
128.	Floor adhesive remnants	Ground Floor Hallway/Passageway (Room G/038)	No Risk			
129.	Floor tile to former shop floor and understairs area	Ground Floor Staircase/Stairwell (Room G/039)	This item is classed as very low risk and should be inspected every 12 months	05/07/24		
130.	Floor adhesive remnants	Ground Floor Staircase/Stairwell (Room G/039)	No Risk			
131.	Wall – within hole in wall under stairs	Ground Floor Staircase/Stairwell (Room G/039)	No Risk			
132.	Window putty/seal to discarded window	Ground Floor Staircase/Stairwell (Room G/039)	This item is classed as very low risk and should be inspected every 12 months	05/07/24		
133.	Floor tile	First Floor Plant Room	No Risk			

		(Room 1/005)					
134.	Floor tile beneath	Second Floor Landing	No Risk				
	carpet	including stairs up (Room 2/001)					
135.	Floor tile beneath carpet	Second Floor Landing (Room 2/003)	No Risk				
136.	Floor tile	Second Floor Plant Room (Room 2/004)	No Risk				
137.	Wall Coating	Second Floor Plant Room (Room 2/004)	No Risk				
138.	Wall void cavity	Second Floor Plant Room (Room 2/004)	No Risk				
139.	Ceiling void insulation top Of ceiling heater	Second Floor Hallway/passageway (Room 2/010)	No Risk				
140.	Floor tile beneath carpet	Second Floor Hallway/passageway (Room 2/013)	No Risk				
141.	Debris/Residue to stairs	Second Floor Fire escape (Room 2/015)	This item should be removed by a licensed contractor asap	N/A	N/A	N/A	Removed Sept 2023
142.	Debris/Residue to side stairs (external wall) including sloping runner	Second Floor Fire escape (Room 2/015)	This item should be removed by a licensed contractor asap	N/A	N/A	N/A	Removed Sept 2023
143.	Floor nosing to stairs	Second Floor Fire escape (Room 2/015)	This item is classed as very low risk and should be inspected every 12 months	05/07/24			
144.	Floor tile beneath carpet	Second Floor Hallway/passageway (Room 2/016)	No Risk				
145.	Floor tile beneath carpet	Second Floor Hallway/passageway (Room 2/017)	No Risk				

146.	Floor tile beneath carpet	Second Floor Store Room (Room 2/018)	No Risk				
147.	Pipework lining to insulation remnants	Second Floor Store Room (Room 2/018)	This item should be removed by a licensed contractor asap	N/A	N/A	N/A	Removed Sept 2023
148.	Window/putty seal from removed window	Second Floor Store Room (Room 2/018)	This item is classed as very low risk and should be inspected every 12 months	05/07/24			
149.	Floor tile beneath carpet	Second Floor Store Room Former toilets (Room 2/019)	No Risk				
150.	Ductwork	Second Floor Store Room Former toilets (Room 2/019)	This item is classed as very low risk and should be inspected every 12 months	05/07/24			
151.	Ceiling void ceiling above panel	Third Floor Landing (Room 3/001)	This item is classed as low risk and should be inspected every 6 months	05/01/24			
152.	Wall tile	Third Floor Plant Room (Room 3/004)	No Risk				
153.	Debris/Residue to stairs	Third Floor Fire Escape (Room 3/016)	This item is classed as low risk and should be inspected every 6 months	05/01/24			
154.	Ceiling sloping Packing to girders	Third Floor Fire Escape (Room 3/016)	No Risk				
155.	Pipework lining to insulation remnants to 2 large pipes and floor	Third Floor Store Room (Room 3/021)	This item should be removed by a licensed contractor asap	N/A	N/A	N/A	Removed Sept 2023
156.	Pipework gaskets	Third Floor Store Room (Room 3/021)	This item is classed as very low risk and should be inspected every 12 months	05/07/24			

157.	Pipework gaskets too deeply recessed to sample	Third Floor Store Room (Room 3/023)	This item is classed as very low risk and should be inspected every 12 months	05/07/24			
158.	Beam cladding suspected continuation from electric cupboard	Fourth Floor Landing (Room 4/001)	This item is classed as very low risk and should be inspected every 12 months	05/07/24			
159.	Beam cladding beneath skim, sampled via pre- existing damage to skim	Fourth Floor Electric cupboard (Room 4/002)	This item should be removed by a licensed contractor asap	N/A	nÖ		
160.	Beam cladding remnants beneath girder	Fourth Floor Hub/Network Room (Room 4/006)	This item is classed as very low risk and should be inspected every 12 months	05/07/24			
161.	Debris/Reside to steel girder	Fourth Floor Hub/Network Room (Room 4/006)	This item should be removed by a licensed contractor asap	N/A	N/A	N/A	Removed Sept 2023
162.	Debris/Residue	Fourth Floor Hub/Network Room (Room 4/006)	No Risk				
163.	Beam cladding remnants beneath girder	Fourth Floor Plant Room (Room 4/007)	This item should be removed by a licensed contractor asap	N/A	N/A	N/A	Removed Sept 2023
164.	Debris/Reside to steel girder	Fourth Floor Plant Room (Room 4/007)	This item is classed as low risk and should be inspected every 6 months	N/A	N/A	N/A	Removed Sept 2023
165.	Debris/Residue	Fourth Floor Plant Room (Room 4/007)	No Risk				
166.	Tank pacing to brackets	Fourth Floor Plant Room (Room 4/007)	No Risk				
167.	Damp proof course	Fourth Floor Plant Room	No Risk				

	surrounding windows	(Room 4/007)				
168.	Fuses/flashguards	Fourth Floor Lift Machinery Room (Room 4/008)	This item is classed as very low risk and should be inspected every 12 months	05/07/24		
169.	Fuses/flashguards isolation strips	Fourth Floor Lift Machinery Room (Room 4/008)	This item is classed as very low risk and should be inspected every 12 months	05/07/24		
170.	Roof felt remnants to concrete	Fourth Floor Fire escape (Room 4/058)	No Risk			
171.	Wall coating to upper metal cladding	Fourth Floor External roof area (Room 4/059)	This item is classed as very low risk and should be inspected every 12 months	05/07/24		
172.	Pipework gaskets to sprinkler system	Mezzanine Switch Room midway between basement and ground floor	This item is classed as very low risk and should be inspected every 12 months	05/07/24		
173.	Wall panel	Ground Floor, Laundry (Room G/001)	No Risk			
174.	Floor tile (with adhesive) grey beneath carpet	Ground Floor, Laundry (Room G/001)	This item is classed as low risk and should be inspected every 6 months	05/01/24		
175.	Wall panel	Ground Floor, Entrance Hall/Foyer/Lobby Main lift lobby (Room G/002)	No Risk			
176.	Ceiling	Ground Floor, Entrance Hall/Foyer/Lobby Main lift lobby (Room G/002)	No Risk			
177.	Wall panel	First Floor, Entrance Hall/Foyer/Lobby Main lift lobby (Room 1/001)	No Risk			

178.	Ceiling	First Floor, Entrance Hall/Foyer/Lobby Main				
		lift lobby (Room 1/001)	No Risk			
179.	Wall panel	First Floor, Entrance Hall/Foyer/Lobby next to				
		northerly fire exit (Room 1/002)	No Risk			
180.	Wall panel	Staircase/Stairwell (Room 1/003)	No Risk			
181.	Floor tile (with	Staircase/Stairwell				
182.	adhesive) red Floor covering	(Room 1/003) Staircase/Stairwell	No Risk			
102.		(Room 1/003)	No Risk			
183.	Wall panel	Corridor west corridor (Room 1/004)	No Risk			
184.	Ceiling	Corridor west corridor (Room 1/004)	No Risk			
185.	Wall panel	Staircase/Stairwell (Room 1/005)	No Risk			
186.	Wall panel	Bedroom 130 (Room 1/006)	No Risk			
187.	Wall panel	Bedroom 214 (Room 1/007)	No Risk			
188.	Wall panel	Entrance Hall/Foyer/Lobby Lift lobby east (Room 2/001)	No Risk			
189.	Wall panel	Staircase/Stairwell North fire exit (Room 2/002)	No Risk			
190.	Floor tile with adhesive (red)	Staircase/Stairwell North fire exit (Room 2/002)	No Risk			
191.	Floor covering	Staircase/Stairwell North fire exit (Room 2/002)	No Risk			
192.	Wall panel	Hallway/passageway Passage to Northerly fire exit (Room 2/003)	No Risk			
193.	Wall panel	Bedroom 230 (Room	No Risk			

		2/004)			
194.	Wall panel	Corridor East Corridor			
		(Room 2/005)	No Risk		
195.	Ceiling	Corridor East Corridor			
		(Room 2/005)	No Risk		
196.	Wall panel	Staircase/Stairwell			
		(Room 2/006)	No Risk		
197.	Wall panel	Kitchen adjacent service			
		cupboard (Room 2/007)	No Risk		
198.	Wall panel	Entrance			
		Hall/Foyer/Lobby Lobby			
		to emergency exit			
100		(Room 2/008)	No Risk		
199.	Wall coating	Staircase/Stairwell			
		Emergency fire exit (Room 2/009)	No Diek		
200.	Wall panel	Bedroom 214 (Room	No Risk		
200.	waii panei	2/010)	No Risk		
201.	Ceiling	Corridor West corridor			
201.	Cennig	(Room 2/011)	No Risk		
202.	Wall panel	Staircase/Stairwell fire	INU INISK		
202.		exit staircase (Room			
		3/001)	No Risk		
203.	Floor tile with	Staircase/Stairwell fire			
200.	adhesive	exit staircase (Room			
		3/001)	No Risk		
204.	Wall panel	Corridor East Corridor			
-		(Room 3/002)	No Risk		
205.	Ceiling coating	Corridor East Corridor			
		(Room 3/002)	No Risk		
206.	Floor tile with	Hallway/Passageway			
	adhesive	(Room 3/003)	No Risk		
207.	Wall panel	Staircase/Stairwell			
		South stairwell (Room			
		3/004)	No Risk		
208.	Wall panel	Entrance	No Risk		

		Hall/Foyer/Lobby (Room				
		3/005)				
209.	Wall panel	Staircase/Stairwell				
		(Room 3/006)	No Risk			
210.	Wall panel	Plant Room (Room				
		3/007)	No Risk			
211.	Wall panel	Bedroom 306 (Room				
		3/008)	No Risk			
212.	Wall coating	Bedroom 330 (Room				
		3/009)	No Risk			
213.	Wall panel	Corridor West Corridor				
		(Room 3/010)	No Risk			
214.	Ceiling coating	Corridor West Corridor				
		(Room 3/010)	No Risk			
215.	Wall coating to	Entrance				
	brickwork	Hall/Foyer/Lobby (Room				
0.1.0		4/001)	No Risk			
216.	Wall panel	Entrance				
		Hall/Foyer/Lobby (Room				
047		4/001)	No Risk			
217.	Wall panel	Bedroom 401 (Room	Ne Diel			
010	Mall manal	4/002)	No Risk			
218.	Wall panel	Bedroom 405 (Room 4/003)	No Risk			
210	Mall nanal		No Risk			
219. 220.	Wall panel	Corridor (Room 4/004)	This item is classed	05/01/24		
220.	Wall coating	Stairs/Hall Landing Roof accessed (Room 4/005)	as low risk and	05/01/24		
		accessed (Room 4/005)	should be inspected			
			every 6 months			
221.	Ceiling	Corridor (Room 4/006)	No Risk			
221.	Floor covering	Rear stairwell adjacent	NOTISK			
222.	Floor covering	Rm 301 (Room 2/001)	No Risk			
223.	Ceiling void –	Corridor adjacent Rm				
	residue to	214 (Room 2/002)				
	redundant radiator		No Risk			
224.	Ceiling void – paint	Corridor adjacent Rm	No Risk			

	coating to ceiling	316 (Room 3/001)			
225.	Debris/Residue to	Loft space within lift			
	ceiling floor below	lobby (Room 1/001)	No Risk		
226.	Debris/Residue to	Loft space within crazy			
	ceiling floor below	lobby (Room 1/002)	No Risk		
227.	Debris/Residue to	Loft space within			
	ceiling floor below	corridors to flats 106-			
		111 (Room 1/003)	No Risk		
228.	Debris/Residue to	Loft space within			
	ceiling floor below	corridor adjacent flat 110			
		(Room 1/004)	No Risk		
229.	Debris/Residue to	Loft space within			
	ceiling floor below	corridors to flats 112-			
		119 (Room 1/005)	No Risk		
230.	Debris/Residue to	Loft space within			
	ceiling floor below	corridors to flats 120-			
		125 (Room 1/006)	No Risk		
231.	Debris/Residue to	Loft space within			
	ceiling floor below	corridors to flats 126-			
		130 (Room 1/007)	No Risk		
232.	Debris/Residue to	Loft space within			
	ceiling floor below	corridor adjacent flat 130			
		(Room 1/008)	No Risk		
233.	Debris/Residue to	Loft space within			
	ceiling floor below	corridors to flats 101-			
		103 (Room 1/009)	No Risk		
234.	Debris/Residue to	Loft space within			
	ceiling floor below	corridors to flats 104-			
		105 (Room 1/010)	No Risk		
235.	Debris/Residue to	Loft space within lift			
	ceiling floor below	lobby (Room 2/001)	No Risk		
236.	Debris/Residue to	Loft space within gaming			
	ceiling floor below	room lobby (Room			
		2/002)	No Risk		
237.	Debris/Residue to	Loft space within			
	ceiling floor below	corridor to flats 207-208	No Risk		

		(Room 2/003)			
238.	Debris/Residue to	Loft space within			
	ceiling floor below	corridor to flats 209-211			
		(Room 2/004)	No Risk		
239.	Debris/Residue to	Loft space within			
	ceiling floor below	corridor adjacent flat 210			
0.40		(Room 2/005)	No Risk		
240.	Debris/Residue to	Loft space within			
	ceiling floor below	corridor to flats 212-219 (Room 2/006)	No Risk		
241.	Debris/Residue to	Loft space within			
241.	ceiling floor below	corridor to flats 220-225			
		(Room 2/007)	No Risk		
242.	Debris/Residue to	Loft space within			
	ceiling floor below	corridor adjacent lift			
		lobby (Room 2/008)	No Risk		
243.	Debris/Residue to	Loft space within			
	ceiling floor below	corridor to flats 226-230			
		(Room 2/009)	No Risk		
244.	Debris/Residue to	Loft space within			
	ceiling floor below	corridor adjacent flat 230			
		(Room 2/010)	No Risk		
245.	Debris/Residue to	Loft space within			
	ceiling floor below	corridor to flats 201-203			
0.4.0	Dahria/Daaiduus ta	(Room 2/011)	No Risk		
246.	Debris/Residue to	Loft space within corridor to flats 204-205			
	ceiling floor below	(Room 2/012)	No Risk		
247.	Debris/Residue to	Loft space within lobby	NUTION		
271.	ceiling floor below	(Room 3/001)	No Risk		
248.	Debris/Residue to	Loft space within football			
2.10.	ceiling floor below	pool room lobby (Room			
		3/002)	No Risk		
249.	Debris/Residue to	Loft space within			
	ceiling floor below	corridor to flats 306-311			
		(Room 3/003)	No Risk		

250.	Debris/Residue to	Loft space within			
	ceiling floor below	corridor adjacent Flat			
		311 (Room 3/004)	No Risk		
251.	Debris/Residue to	Loft space within			
	ceiling floor below	corridor to flats 312-319			
		(Room 3/005)	No Risk		
252.	Debris/Residue to	Loft space within			
	ceiling floor below	corridor to flats 320-325			
		(Room 3/006)	No Risk		
253.	Debris/Residue to	Loft space within			
	ceiling floor below	corridor adjacent Flat			
		321 (Room 3/007)	No Risk		
254.	Debris/Residue to	Loft space within			
	ceiling floor below	corridor to flats 326-330			
		(Room 3/008)	No Risk		
255.	Debris/Residue to	Loft space within			
	ceiling floor below	corridor adjacent flat 330			
		(Room 3/009)	No Risk		
256.	Debris/Residue to	Loft space within			
	ceiling floor below	corridor to flats 301-304			
		(Room 3/010)	No Risk		
257.	Debris/Residue to	Loft space within			
	ceiling floor below	corridor to flats 301-304			
		(Room 3/011)	No Risk		
258.	Debris/Residue to	Loft space within			
	ceiling floor below	corridor to flats 413-414			
		(Room 4/001)	No Risk		
259.	Debris/Residue to	Loft space within			
	ceiling floor below	corridor to flats 408-412			
		(Room 4/002)	No Risk		
260.	Debris/Residue to	Loft space within			
	ceiling floor below	corridor to flats 415-416			
		(Room 4/003)	No Risk		
261.	Debris/Residue to	Loft space within			
	ceiling floor below	corridor to flats 403-407			
		(Room 4/004)	No Risk		

262.	Textured coated	Loft space/Ceiling void			
	wall & debris to	(R/01)			
	ceiling loft space				
	where the wall had				
	been damaged to				
	ducting installation		No Risk		



Jopling House Last updated 27/06/2025 V.2.0

Good Practice Guidance:

- Take photographs of ACMs for each inspection and store for future reference
- Compare previous photographs with current condition state to determine whether there has been any deterioration the last inspection
- Replace missing/damaged asbestos labels/stickers

Comments:

School/Site:	
Date of inspection:	
Inspected by (signature):	

Print Name:	



Jopling House Last updated 27/06/2025 V.2.0